

## Asymmetrical Lens Extrusion


### STANDARD ASYMMETRICAL LENS EXTRUSION

*PROASYML*

19.2W p/m, 22W p/m

The Asymmetrical lens profile provides the perfect remedy for those attempting to achieve a more even light dispersion. Through manipulation of the traditional symmetrical beam, the Asymmetrical lens provides an ideal wall washing effect as it evenly grazes the entirety of the wall face.

IP40

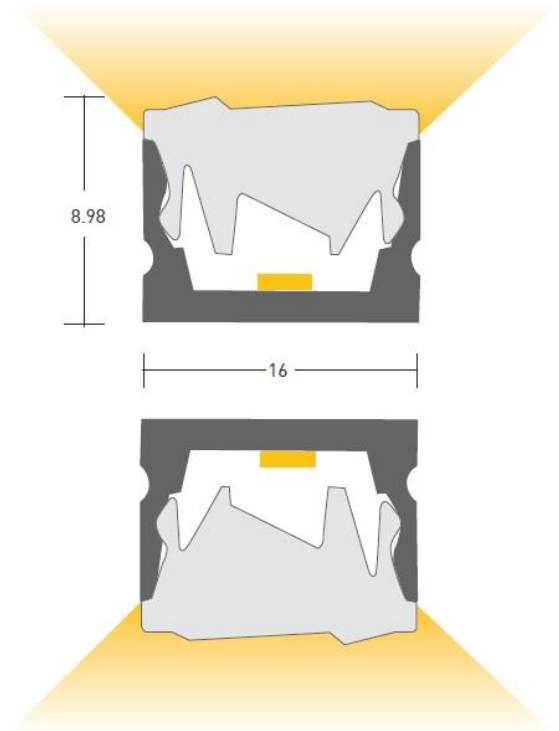

CODE	WATTS/M	LUMENS/M	CRI	VOLTS	FINISH	CCT	DIMMABLE	BEAM ANGLE
PROASYML	19.2W	1100	>95	24V	Silver	2700K	TRIAC DALI 0-10v	ASY
	22W	1800				3000K 4000K 6500K		