

Winter CAN Lights Release



CLTORO12W



CLTORO20W

TORO CAN LIGHT RANGE

- Aluminium body (Black or White)
- Trim options- white or black
- Triac dimming
- COB
- IP44 rating

COLOUR OPTIONS



White body
White trim



White body
Black trim



Black body
White trim



Black body
Black trim

TALL ROUND CAN LIGHTS SPECIFICATIONS

Code	Size	Watts	Lumens	CRI	Colour Temp.	Beam Angle
CLTORO12W	Ø73 x 125	12W	1080	>90	2700K/3000K/4000K/5000K	12°, 24°, 38°, 55°
CLTORO20W	Ø93 x 160	20W	1800	>90	2700K/3000K/4000K/5000K	12°, 24°, 38°, 55°



CLROSS015W



CLROSS010W



CLROSS010W



CLROSS015W

ROSSO ROUND CAN LIGHT RANGE

- Aluminium body (Black or White)
- Trim options- white, black or chrome
- Triac dimming
- COB
- IP44 rating



Shown with Chrome trim

COLOUR OPTIONS



White body
White trim



White body
Black trim



White body
Chrome trim



Black body
White trim



Black body
Black trim



Black body
Chrome trim

SQUAT ROUND CAN LIGHTS SPECIFICATIONS						
Code	Size	Watts	Lumens	CRI	Colour Temp.	Beam Angle
CLROSS010W	ø90 x 90	10W	900	>90	2700K/3000K/4000K/5000K	50°
CLROSS015W	ø110 x 120	15W	1350	>90	2700K/3000K/4000K/5000K	50°

*25W available on request


TEC=LED

TecLed Pty Ltd

Unit 4, 61 - 71 Beauchamp Road, Matraville NSW 2036

Telephone: (02) 9317 4177 Facsimile: (02) 9317 3544


Email: sales@tecled.com.au

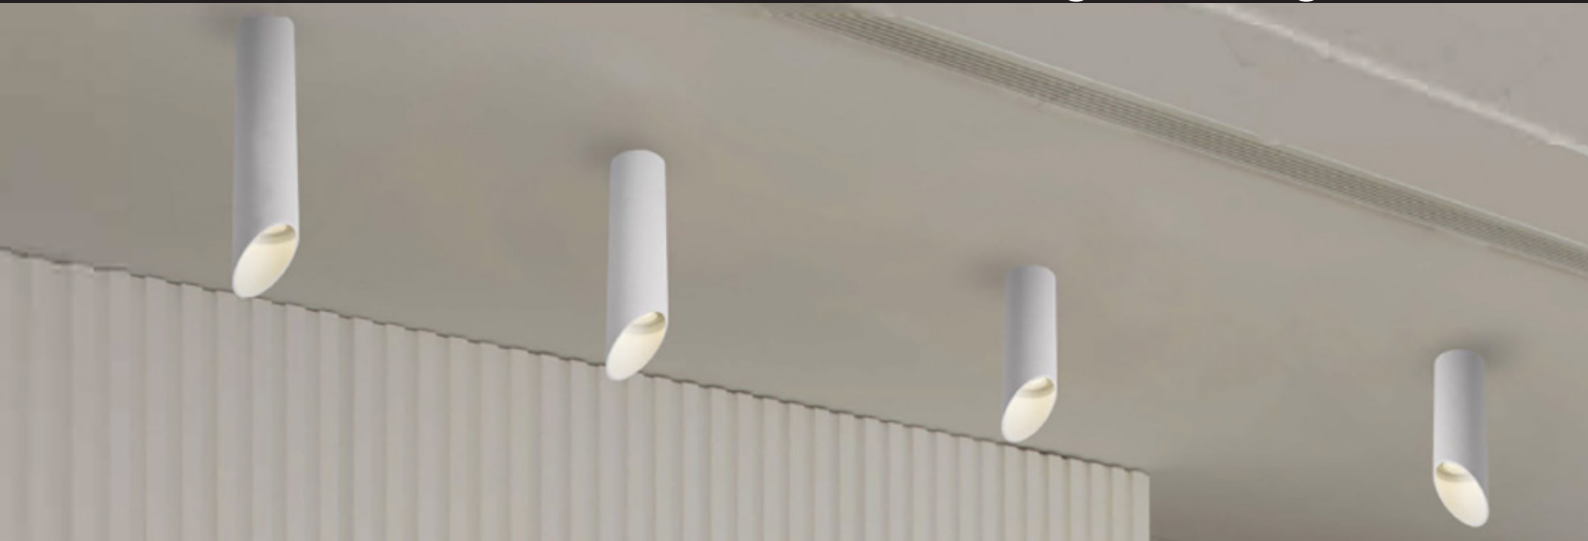

ALICE



Suspended option for
LCLR13W, 20W, 25W



LCLRSUSP

Light suspended on 12mm hollow
s/steel tube with concealed power
cable and ceiling plate.

ALICE SPECIFICATIONS

Code	Colour Temp.	Watts	Lumens	Beam angle	CRI	Dimensions	Rating	Colour	Dimmable
LCLR12W	2700K, 3000K, 4000K	12W	760	60°	>80	100h x Ø90mm	IP44	Black, White	Yes
LCLR13W	2700K, 3000K, 4000K	13W	1100	24°, 38°, 60°	>90	150mm x 90mm	IP44	Black, White	Yes
LCLR20W	2700K, 3000K, 4000K	20W	1800	24°, 38°, 60°	>90	200mm x 90mm	IP44	Black, White	Yes
LCLR25W	2700K, 3000K, 4000K	25W	2400	24°, 38°, 60°	>90	250mm x 90mm	IP44	Black, White	Yes

ACE




LCLACE10W
LCLACE20W
LCLACE30W (available on special order only)

Rating

IP

IP54

	A	B
10W	Ø100	163
20W	Ø130	184
30W	Ø145	220



LACE SPECIFICATIONS

Code	Colour Temp.	Watts	Lumens	Beam angle	CRI	Dimensions	Rating	Colour	Dimmable
LCLACE10W/20W/30W	3000K	10W, 20W, 30W	800, 1600, 2400	60°	>80	See above table	IP54	Black	Yes


VEX




CLVEX12W - Single 12W



CLVEX24W - Twin 24W



Adjustable

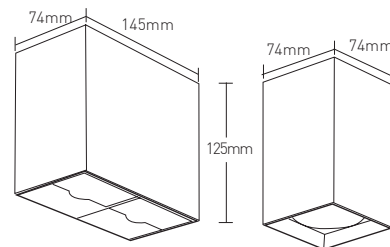

Baffle colour range



Black



White



Chrome



Golden

MARY SPECIFICATIONS									
Code	Colour Temp.	Watts	Lumens	Beam angle	CRI	Dimensions	Rating	Colour	Dimmable
CLVEX12W	2700K, 3000K, 4000K	1 x 12W	1080	15°, 24°, 36°	>90	74 x 74 x 125	IP54	Black, White	Yes
CLVEX24W	2700K, 3000K, 4000K	2 x 12W	2160	15°, 24°, 36°	>90	74 x 145 x 125	IP54	Black, White	Yes

WAX




CLWAX8WS
CLWAX15WS



CLWAX8WL
CLWAX15WL




1m
suspension cable
option

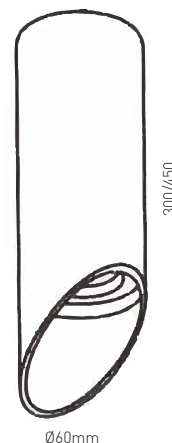


Ø60mm

MARY SLOPE SPECIFICATIONS									
Code	Colour Temp.	Watts	Lumens	Beam angle	CRI	Dimensions	Rating	Colour	Dimmable
CLWAX8WS/15WS	2700K, 3000K, 4000K	8W/15W	750/1400	12°, 24°, 36°	>90	300mm x Ø60	IP20	Black, White, Grey	Yes
CLWAX8WL/15WL	2700K, 3000K, 4000K	8W/15W	750/1400	12°, 24°, 36°	>90	450mm x Ø60	IP20	Black, White, Grey	Yes

TWISTY

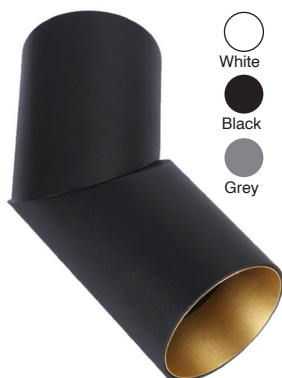

CLTWISTYR9W
CLTWISTYR12W



Ø63mm

Baffle colour range
(both models)




White

Gold

Black






CLTWISTYVEX9W
CLTWISTYVEX15W





60mm

MARY TWIST SPECIFICATIONS									
Code	Colour Temp.	Watts	Lumens	Beam angle	CRI	Dimensions	Rating	Colour	Dimmable
CLTWISTYR9W/12W	2700K, 3000K, 4000K	9W/12W	765/1020	12°, 24°, 36°, 60°	>90	181mm x Ø63mm	IP20	Black, White, Grey	Yes
CLTWISTYVEX9W/15W	2700K, 3000K, 4000K	9W/15W	765/1275	12°, 24°, 36°, 60°	>90	180mm x 60mm	IP20	Black, White, Grey	Yes


Surface Mounted

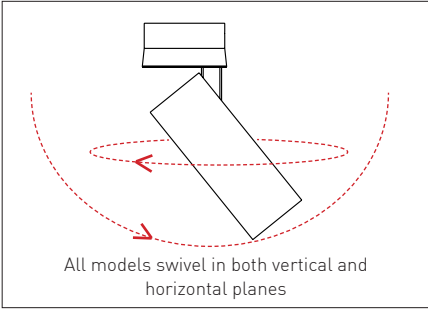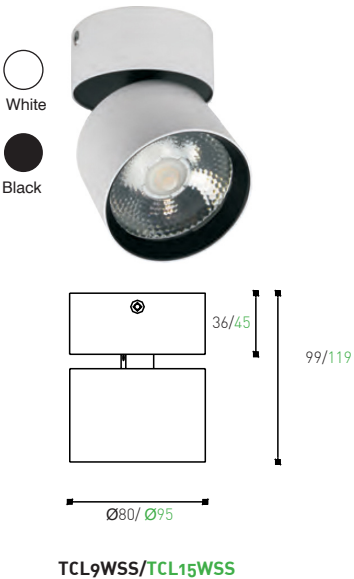

Recessed

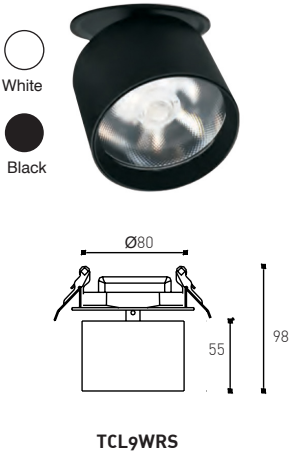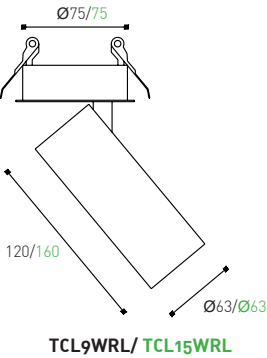

LEDOUX SPECIFICATIONS										
Code	Colour Temp.	Watts	Lumens	Beam angle	CRI	Casing	Cut-out	Rating	Colour	Dimmable
TLCL9WSL	2700, 3000K	9W	643	24°/38°	>90	Aluminium	n/a	IP20	Black/White	Yes
TLCL15WSL	2700, 3000K	15W	860	24°/38°		Aluminium	n/a	IP20	Black/White	Yes
TLCL9WSS	2700, 3000K	9W	643	24°/38°		Aluminium	n/a	IP20	Black/White	Yes
TLCL15WSS	2700, 3000K	15W	860	24°/38°		Aluminium	n/a	IP20	Black/White	Yes
TLCL9WRL	2700, 3000K	9W	643	20°/36°		Aluminium	Ø75mm	IP20	Black/White	Yes
TLCL15WRL	2700, 3000K	15W	996	20°/36°		Aluminium	Ø75mm	IP20	Black/White	Yes
TLCL9WRS	2700, 3000K	9W	715	20°/36°		Aluminium	Ø80mm	IP20	Black/White	Yes

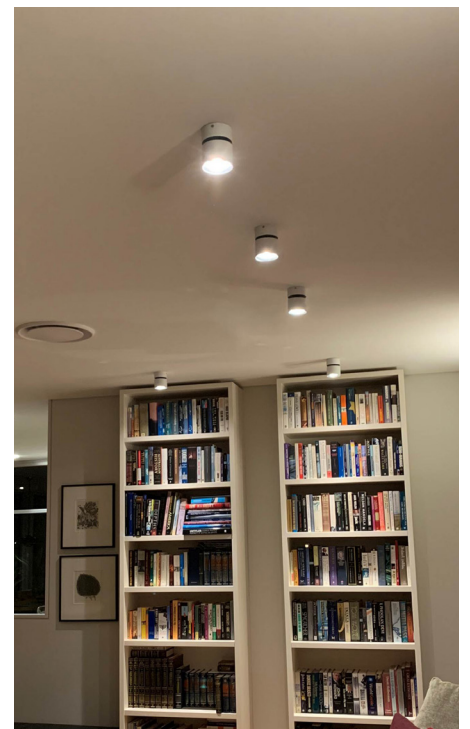

TEC=LED

TecLed Pty Ltd

Unit 4, 61 - 71 Beauchamp Road, Matraville NSW 2036

Telephone: (02) 9317 4177 Facsimile: (02) 9317 3544

Email: sales@tecled.com.au