

LED Downlights Collection



TEC=LED

LED Downlights Collection

ZELA	3
STANDARD	4
VISION	5
BOOM	6
SNOOT	7
COMMERCIAL	7
MINI	8, 9
SQUARE	11
GRILL	11

Lighting design by Wildly Illuminating



ZELA



DLZFIXED - Fixed
4.3W / 6.4W / 9.4W



DLZFIXED - Fixed (with honeycomb)



DLZDFIXED - Deep Fixed
4.3W / 7.7W / 11W



DLZTILTZ - Adjustable
4.3W / 7.7W / 11W



DLZDTILTZ - Deep Adjustable
4.3W / 7.7W / 9.4W / 13W



DLZODTILTZ - Offset Adjustable
4.3W / 7.7W / 9.4W / 13W

ZELA SPECIFICATIONS

CODE	WATTS	BEAM ANGLE*	CRI	DIMENSIONS (mm)	LUMENS	HOLE SIZE	COLOUR TEMP.	DIMMING	RATING
DLZFIXED	4.3W / 6.4W / 9.4W	9°, 15°, 20°, 40°, 55°	<97	Ø65 x 43	260 - 820	Ø52	2400K, 2700K, 3000K, 4000K and SSD	TRIAC or DALI	IP65
DLZDFIXED	4.3W / 7.7W / 11W		<97	Ø82 x 57	260 - 940	Ø73			
DLZTILTZ	4.3W / 7.7W / 11W		<97	Ø82 x 51	260 - 960	Ø73			
DLZDTILTZ	4.3W / 7.7W / 9.4W / 13W		<97	Ø98 x 71	300 - 1070	Ø89			
DLZODTILTZ	4.3W / 7.7W / 9.4W / 13W		<97	Ø109 x 75	260 - 1060	Ø100			

Lens Options: Clear, Prismatic, Lensed, Honeycomb (30° & 40° only)

Fire rated option available

*Some beam angles not available with some wattages



Double and triple adaptor plates available

ZELA Decor - fixed



DLDECZ - clear glass
4.4W / 6.4W / 7.7W / 9.4W / 11W



DLDECZ - lens
4.4W / 6.4W / 7.7W / 9.4W / 11W



Trim Options

ZELA DECOR SPECIFICATIONS

CODE	WATTS	BEAM ANGLE	CRI	DIMENSIONS (mm)	LUMENS	HOLE SIZE	COLOUR TEMP.	DIMMING	RATING
DLDECZ	4.4W / 6.4W / 7.7W / 9.4W / 11W	9°, 15°, 20°, 30°, 40°	<90	Ø65 x 67	310, 440, 510, 600, 680	Ø57	2400K, 2700K, 3000K, 4000K SSD and Tunable White	TRIAC or Dali	IP65

STANDARD



DLPIRA13W - Piranha
13W

DLPIRA17W - Piranha
17W






DLCARIBA9W - Cariba fixed
9W



DLCOLT13W - Colt fixed
13W

SPECIFICATIONS								
CODE	WATTS	BEAM ANGLE	CRI	DIMENSIONS (mm)	LUMENS	HOLE SIZE	COLOUR TEMP.	DIMMING
DLPIRA13W	13W	24°/ 38°/ 60°	<90	Ø100 x 95mm	971	Ø90mm	2700K, 3000K, 4000K and SSD	TRIAC or DALI
DLPIRA17W	17W	24°/ 38°/ 60°	<90	Ø100 x 95mm	1100	Ø90mm		
DLCARIBA9W	9W	20°, 40°, 60°	<90	Ø100 x 60mm	750/1070	Ø90mm		
DLCOLT13W	13W	90°	<80	Ø110 x 41mm	950	Ø90mm		

VISION

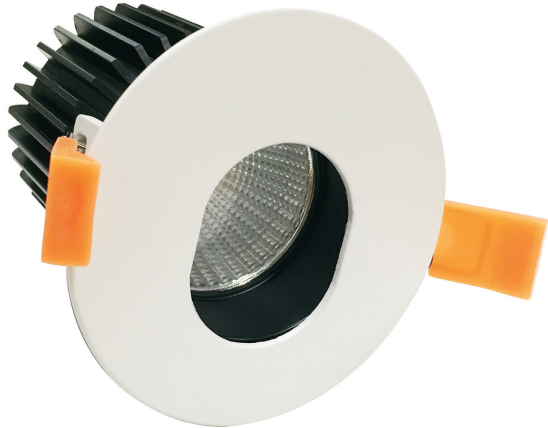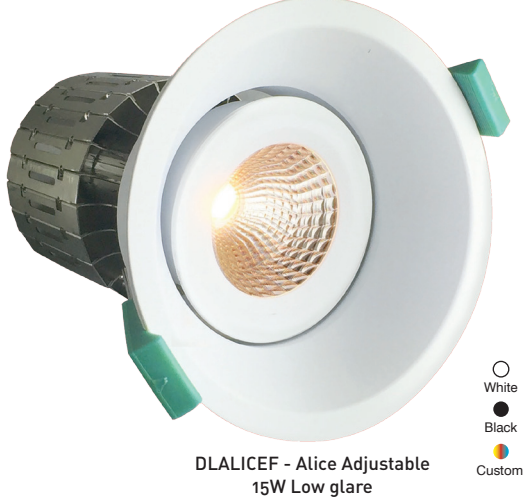


SPECIFICATIONS								
CODE	WATTS	BEAM ANGLE	CRI	DIMENSIONS (mm)	LUMENS	HOLE SIZE	COLOUR TEMP.	DIMMING
DLALICEF	15W	24°/ 38°/ 60°	<90	Ø100 x 108mm	1100	Ø90	2700K - 5000K and SSD	TRIAC or DALI 0 - 10V
DLALICEF	15W	24°/ 38°/ 60°	<90	Ø100 x 108mm	1100	Ø90		
DLPANDA	15W	24°/ 38°/ 60°	<90	Ø95 x 103mm	1100	Ø80mm		
DLPINCIR	15W	15°/ 24°/ 38°	<90	Ø89x 87mm	950/1100	Ø72		
DLPINOV	15W	15°/ 24°/ 38°	<90	Ø89x 87mm	950/1100	Ø72		

BOOM High Efficiency Downlight



DLB00M5W / 10W / 15W

- High Luminous efficacy, Low Glare
- Narrow trim
- Parallel deep baffle
- Colour options:
Matt white, Black with white trim, Matt black




White



Black/White



Black



Deep baffle delivers low glare



BOOM SPECIFICATIONS								
CODE	WATTS	BEAM ANGLE	CRI	DIMENSIONS (mm)	LUMENS	HOLE SIZE	COLOUR TEMP.	DIMMING
DLB00M5W	5W	15°, 24° 38°	<90	Ø61 x 85	500-600	Ø55	2700K, 3000K, 4000K, 5000K	TRIAC or DALI 0-10v
DLB00M10W	10W	15°, 24° 38°	<90	Ø61x 100	1000-1100	Ø55	2700K, 3000K, 4000K, 5000K	
DLB00M15W	15W	15°, 24° 38°	<90	Ø81 x 135	1500-1600	Ø75	2700K, 3000K, 4000K, 5000K	

Lighting design by FPOV



SNOOT



○ White
● Black

DLSNOOT - Single
10W, 15W



○ White
● Black

DLSNOOT2X10W - Twin
2 x 10W



○ White
● Black

DLMINISNOOT - Mini Snot
7W




○ White
● Black

DLMRSNOOT - Semi Recessed Snot
12W/15W

SNOOT SPECIFICATIONS								
CODE	WATTS	BEAM ANGLE	CRI	DIMENSIONS (mm)	LUMENS	HOLE SIZE	COLOUR TEMP.	DIMMING
DLSNOOT10W	10W	15°, 24°, 36°, 60°	<90	98 x 120	900-1050	Ø90	2700K, - 5000K and SSD	TRIAC or DALI
DLSNOOT15W	15W	15°, 24°, 36°, 60°	<90	98 x 120	1300	Ø90		
DLSNOOT2X10W	2 x 10W	15°, 24°, 36°, 60°	<90	100 x 185	1800-2100	2 x Ø90		
DLMINISNOOT	7W	15°, 24° 38°	<90	Ø37 x 46	590	Ø55		
DLMRSNOOT	12W / 15W	15°, 24°, 36°, 60°	<90	Ø63 x 118	1100 / 1375	Ø65		

COMMERCIAL

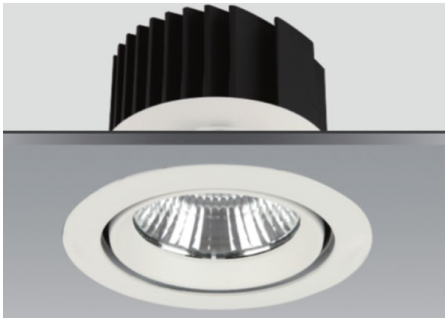

DLGRAND
19W
28W

DLGRANDOISE
42W
50W



DLALFI15W - Alfi
15W
30W



Alfi with hood

○ White
● Black
● Grey

COMMERCIAL SPECIFICATIONS								
CODE	WATTS	BEAM ANGLE	CRI	DIMENSIONS (mm)	LUMENS	HOLE SIZE	COLOUR TEMP.	DIMMING
DLGRAND	19W/28W	15°, 24°, 36°, 60°	<90	Ø145 x 104	2035/3000	Ø138	2700K, 3000K, 4000K, 5000K	TRIAC
DLGRANDOISE	42W/50W	15°, 24°, 36°, 60°	<90	Ø165 x 114	4500/5357	Ø153	2700K, 3000K, 4000K, 5000K	
DLALFI15W	15W	15°, 24°, 36°	<80	Ø92 x 79	1500	Ø88	3000K, 4000K	
DLALFI30W	30W	15°, 24°, 36°	<80	Ø101 x 103	1500/3000	Ø110	3000K, 4000K,	

MINI RECESSED FIXED OUTDOOR



LMRSM01W
Marker spring mount



LMRSM1W
Mini spring mount



LMRF01W
Marker friction mount



LMRF1W
Mini friction mount



TLDD5W
Spring mount
Marine Grade



Marine Grade Trim options

Housing colours
● Natural anodised ● Black anodised ● Copper ● Stainless steel

MINI RECESSED SPECIFICATIONS								
CODE	WATTS	BEAM ANGLE	DIMENSIONS (mm)	LUMENS	RATING	HOLE SIZE	COLOUR TEMP.	DIMMING
LMRSM01W	1W	30°, 70°	Ø30 x 18	100	IP67	Ø20	2700K, 3000K, 4000K	TRIAC or DALI
LMRF01W	1W	30°, 70°	Ø20 x 18	100	IP67	Ø16	2700K, 3000K, 4000K	
LMRSM1W	1W	30°, 70°	Ø30 x 18	100	IP67	Ø20	2700K, 3000K, 4000K	
LMRF1W	1W	30°, 70°	Ø20 x 18	100	IP67	Ø16	2700K, 3000K, 4000K	
TLDD5W	5W	22°, 38°, 45°	Ø54 x 33	270 / 315	IP67	Ø44 - Ø46	3000K	

MINI



DLSHADOW
4W



DLFLUTE
3W Dimmable




DLALICEMINI
Adjustable 3W



DLBLADE
9W



optional cone and
honeycomb filter

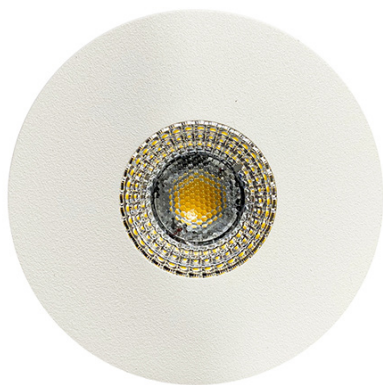

DLALPHA
3W



DLCABINET
4W

○ White
● Black
● Silver

MINI SPECIFICATIONS

CODE	WATTS	CRI	BEAM ANGLE	DIMENSIONS (mm)	LUMENS	HOLE SIZE mm	COLOUR TEMP.	DIMMING
DLSHADOW	4W	<90	30°, 45°, 60°	Ø51mm x 32mm	300	Ø42	2700K - 3000K	TRIAC
DLFLUTE	3W	<90	38°	Ø35mm x 49mm	150	Ø28	2000K - 3000K	TRIAC
DLALICEMINI	3W	<90	15°, 24°, 38°	Ø50mm x 38mm	240	Ø42	2700K, 3000K, 4000K	TRIAC
DLBLADE	9W	<90	20°, 30°, 38°	Ø80mm x 25mm	643	Ø74	2000K - 3000K	TRIAC
DLALPHA	3W	<92	24°, 36°, 60°	Ø60mm x 16mm	340	Ø50	2700K, 3000K	TRIAC
DLCABINET	4W	<80	120°	Ø69mm x 12mm	100-120(DL), 80-90(WW)	Ø55	2800-3000K / 6000-6500K	NO




Lighting design by Malaya Blonde



SQUARE



DLPSQ - Single
13W



DLASQ - Single
15W



DLPSQ2
2 x 13W
2 x 17W



DLPSQ3
3 x 13W
3 x 17W

SQUARE SPECIFICATIONS							
CODE	WATTS	BEAM ANGLE	CRI	DIMENSIONS (mm)	LUMENS	HOLE SIZE mm	COLOUR TEMP.
DLPSQ	1 x 13W	24°/ 38°/ 60°	<90	110 x 110 x 90	971	98mm x 98mm	2700K - 3000K
DLASQ	1 x 15w	24°/ 38°/ 60°	<90	102 x 102 x 121	1100	80mm x 80mm	2700K - 6500K
DLPSQ2	2 x 13W	24°/ 38°/ 60°	<90	200 x 110 x 121 x 121	1800 / 3000	190mm x 100mm	2700K - 3000K
DLPSQ3	3 x 13W	24°/ 38°/ 60°	<90	290 x 110	2900 / 4500	200mm x 100mm	2700K - 6500K



GRILL



DVENO
1 x 15W



DVENO2
1 x 15W



GRILL SPECIFICATIONS								
CODE	WATTS	BEAM ANGLE	CRI	DIMENSIONS (mm)	LUMENS	HOLE SIZE mm	COLOUR TEMP.	DIMMING
DLVENO	1 x 15W	15°/ 24°/ 36°/60°	<90	110 x 110 x 90	1500	100 x 100	2700K, 3000K, 400K, 5000K	TRIAC or DALI
DLVENO2	2 x 15W	15°/ 24°/ 36°/60°	<90	220 x 110 x 90	1500 x 2	210 x 100	2700K, 3000K, 400K, 5000K	

HOTEL Downlight Series




TECLED's Hotel Series ushers in a new level of flexibility, adaptability and modular 'mix-n-match'. The range boasts a wide choice and variety for virtually all components, offering endless possibilities and variants in an aluminium alloy construction

- 360° Rotatable, fixed, 30° adjustable, recessed or trimless
- Three optical lens choices
- Six baffle colour options
- 4 frame options



Beam Angle



Optical Lens




Baffle



Frame



Ring



Ø65
LDHTL10W55

(See below for all model dimensions)

SPECIFICATIONS

Code	Watts	Input	Lumens	Colour Temp.	Dimensions (mm)		Cut Out (mm)		Dimmable	Chip	Rating
					Round	Square	Round	Square			
LDHTL10W55	10W	AC240V	900	2700 - 5000K	Ø65 x 75	65 x 65	Ø55	55 x 55	Yes	CREE	IP20
LDHTL10W75	10W	AC240V	900	2700 - 5000K	Ø85 x 85	85 x 85	Ø75	75 x 75	Yes	CREE	IP20
LDHTL15W75	15W	AC240V	1350	2700 - 5000K	Ø85 x 85	85 x 85	Ø75	75 x 75	Yes	CREE	IP20
LDHTL20W95	20W	AC240V	1800	2700 - 5000K	Ø106 x 114	100 x 100	Ø95	95 x 95	Yes	CREE	IP20
LDHTL25W95	25W	AC240V	2250	2700 - 5000K	Ø106 x 114	100 x 100	Ø95	95 x 95	Yes	CREE	IP20
LDHTL30W95	30W	AC240V	2700	2700 - 5000K	Ø106 x 114	100 x 100	Ø95	95 x 95	Yes	CREE	IP20
LDHTL30W120	30W	AC240V	2700	2700 - 5000K	Ø135 x 137	100 x 100	Ø120	120 x 120	Yes	CREE	IP20
LDHTL40W150	40W	AC240V	3600	2700 - 5000K	Ø160 x 162	100 x 100	Ø150	150 x 150	Yes	CREE	IP20

Lighting design by Malaya Blonde



TEC=LED

TecLed Pty Ltd

Unit 4, 61 - 71 Beauchamp Road, Matraville NSW 2036

Telephone: (02) 9317 4177 Facsimile: (02) 9317 3544

Email: sales@tecled.com.au