

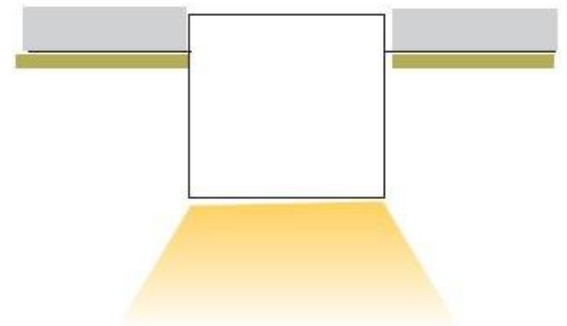


LED PROFILE HERCULES

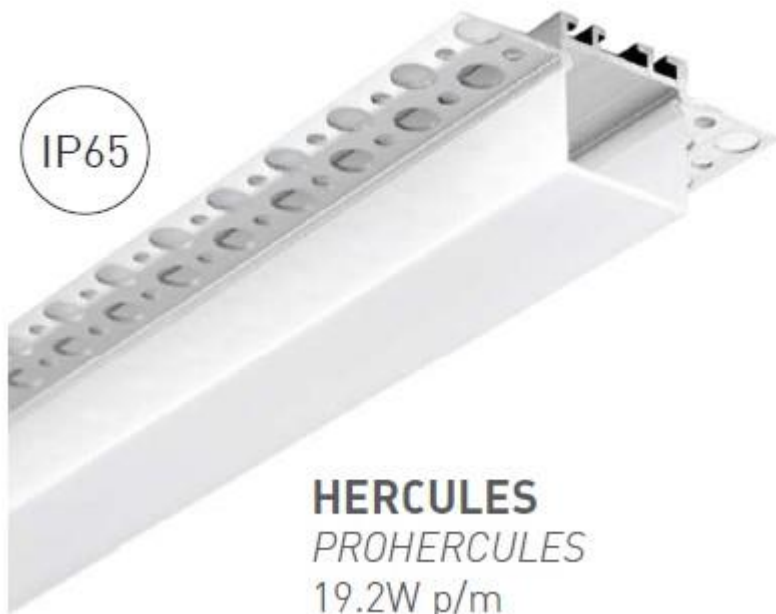

Installed in flat vertical or horizontal surface

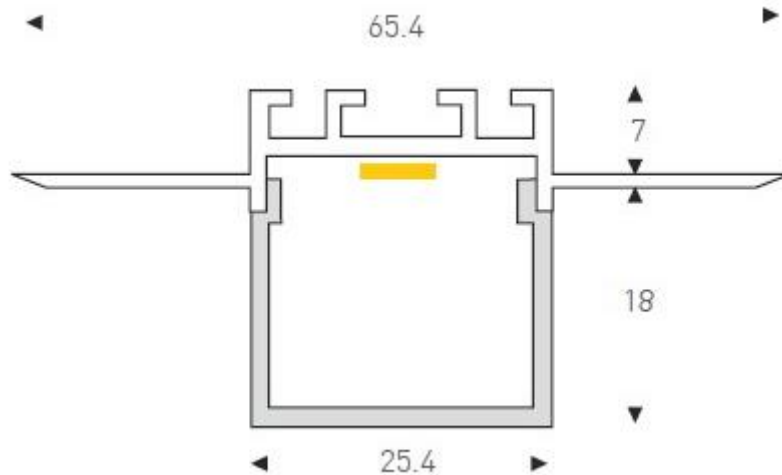

CODE	WATTS/M	LUMENS/M	CRI	VOLTS	FINISH	CCT	DIMMABLE	BEAM ANGLE
PROHERCULES	19.2W	1700	>90	24V	Standard Silver	2700K 3000K 4000K 6500K	TRIAC/DALI/0-10v	120°