

TEC=LED

LED Outdoor Lights



Darcy Arms designed by



LED Recessed Inground, Outdoor Lights

- Stainless steel
- Fixed and adjustable
- Tempered glass lens withstands impact
- IP67 Rating
- 24VDC



IG3WFXD

Watts

W

3W

Chip

Osram

Lumens

L

150-180

Beam angles


10°/15°/30°
40°/60°


Cut Out


Ø80

Rating

IP

IP67

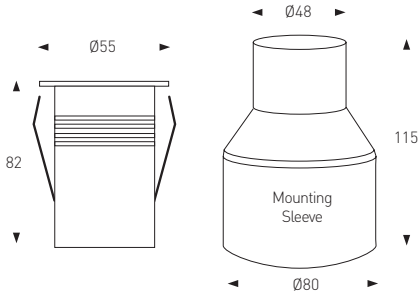

Ø55, 82, Ø48, 115, Ø80, Mounting Sleeve



IG5WFXD
IG10WFXD

Watts

W

5W
10W

Chip

Cree

Lumens

L

350-400
700-800

Beam angles


10°/30°
60°


Cut Out


Ø103

Rating

IP

IP67

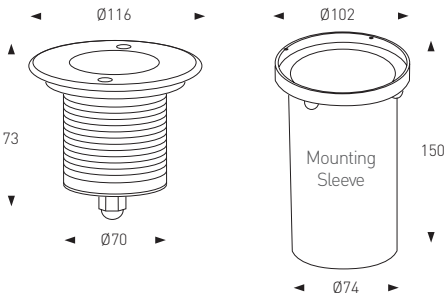

Ø116, 73, Ø102, 150, Ø74, Mounting Sleeve



IG18WFXD

Watts

W

18W

Chip

Cree

Lumens

L

1570-1800

Beam angles


18°/24°/38°/60°


Cut Out


Ø158

Rating

IP

IP67

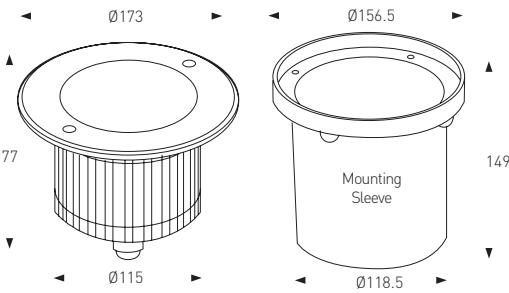

Ø173, 77, Ø156.5, 149, Ø115, Ø118.5, Mounting Sleeve



IG12X3WFXD

Watts

W

12x3W

Chip

Cree

Lumens

L

1800-1900

Beam angles


10°/25°/45°/60°


Cut Out


Ø173

Rating

IP

IP67

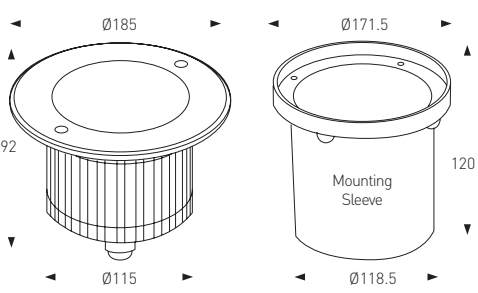

Ø185, 92, Ø171.5, 120, Ø115, Ø118.5, Mounting Sleeve



IG5WADJ
IG10WADJ
IG15WADJ

Watts

W

5W
10W
15W

Chip

Cree

Lumens

L

350-400
700-800
1050-1200

Beam angles


18°/24°/36°/60°


Cut Out


Ø86
Ø120
Ø149

Rating

IP

IP67

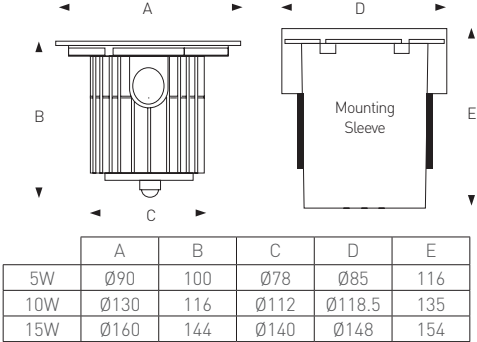

A, B, C, D, E, Mounting Sleeve

	A	B	C	D	E
5W	Ø90	100	Ø78	Ø85	116
10W	Ø130	116	Ø112	Ø118.5	135
15W	Ø160	144	Ø140	Ø148	154


LED In Ground Rigid lights

A range of continuous strip lighting for indoor or outdoor, emitting soft, diffused dot-free light.


All models:

Rating: IP67; Colour Temperature: 2700K and 3000K; CRI: >90


Available in lengths of 500mm and 1000mm and can be 'ganged up' for longer runs.

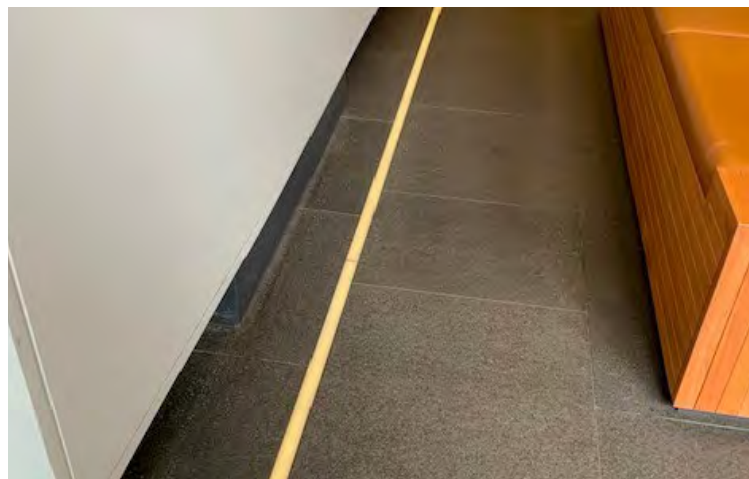


LIGRA10W




LIGRB10W



LIGRB15W



LIGRA15W



SPECIFICATIONS

CODE	WATTS p/m	MOUNTING	INPUT VOLTAGE	LUMENS p/m
LIGRA10W	10W	Recessed	24V	400
LMIGRB10W	10W	Recessed	24V	400
LIGRB15W	15W	Recessed or Surface	24V	600
LIGRA15W	15W	Recessed or Surface	24V	600

LED Mini Recessed lights

A discrete marker light for driveways, pathways, retaining walls or borders of patios and decks. Improves safety and security, and their soft red, green, blue or white glow enhance landscape environments.



LMRS01W

Marker spring mount



LMR01W

Marker friction mount



LMRS1W

Mini spring mount



LMRF1W

Mini friction mount



LMRS5W

Spring mount
(Downlight only)

Housing colours

- Natural anodised
- Black anodised
- Copper
- Stainless steel

Housing colours

- Natural anodised
- Black anodised
- Stainless steel

Housing colours

- Natural anodised
- Black anodised
- Copper
- Stainless steel



Mini Spike
for in-ground
mounting of
LMRF1W
(20 x 200mm)

Housing colours

- Natural anodised
- Black anodised
- White
- Stainless steel

SPECIFICATIONS


CODE	WATTS	DIMENSIONS (mm)	BEAM ANGLE	INPUT VOLTAGE	LUMENS	HOLE SIZE	COLOUR TEMP.	IP Rating
LMRF01W	0.1W	Ø30 x 18	30°, 70°	350mA	<1	Ø20	2700, 3000, 4000K	IP67
LMRF01W	0.1W	Ø20 x 18	30°, 70°	350mA	<1	Ø16	2700, 3000, 4000K	IP67
LMRS1W	1W	Ø30 x 18	30°, 70°	350mA	100	Ø20	2700, 3000, 4000K	IP67
LMRF1W	1W	Ø20 x 18	30°, 70°	350mA	100	Ø16	2700, 3000, 4000K	IP67
LMRS5W	5W	Ø54 x 33	22°, 38°, 45°	350mA	355	Ø45	2700, 3000, 4000K	IP67

LED Foot Lights


SLOT IN WALL LIGHTS



LWLRNDSLCT3W





LWLSQRSLCT3W

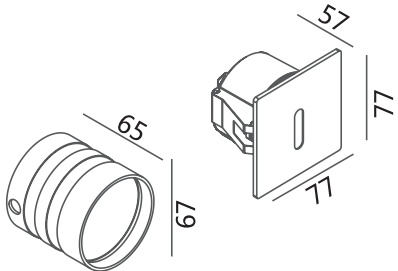



SLOT LIGHT SPECIFICATIONS								
CODE	DESCRIPTION	DIMENSIONS (mm)	WATTS	INPUT	CUT OUT	COLOUR TEMP.	IP RATING	FINISH
LWLRNDSLCT3W	Round Slot wall light	See diagram above	3W	350mA	Ø68mm	3000K	IP65	White
LWLSQRSLCT3W	Square Slot wall light	See diagram above	3W	350mA	Ø68mm	3000K	IP65	White, Black

ROUND HALO

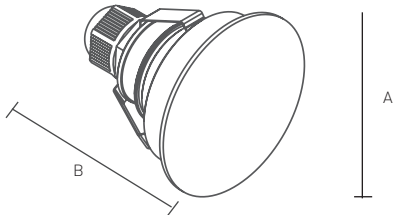



ROUND HALO SPECIFICATIONS								
CODE	DESCRIPTION	DIMENSIONS (mm)	WATTS	INPUT	CUT OUT	COLOUR TEMP.	IP RATING	FINISH
LOWLHALO3W	Round halo in-wall light	A=Ø60mm B= 59mm	2.6W	700mA	Ø37mm	3000K	IP65	White
LOWLHALO4W	Round halo in-wall light	A=Ø90mm B= 39mm	3.7W	24vDC	Ø71mm	3000K	IP65	White
LOWLHALO7W	Round halo in-wall light	A=Ø150mm B= 42mm	6.7W	24vDC	Ø128mm	3000K	IP65	White

SQUARE FOOTLIGHT

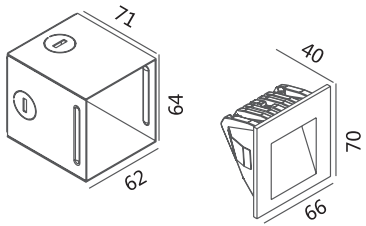


SQUARE FOOTLIGHT SPECIFICATIONS								
CODE	DESCRIPTION	DIMENSIONS (mm)	WATTS	INPUT	CUT OUT	COLOUR TEMP.	IP RATING	FINISH
LOWLSQRHALO3W	Square halo in-wall light	See diagram above	2.8W	24vDC	60 x 60mm	3000K	IP65	White/Black

WEDGE FOOTLIGHT

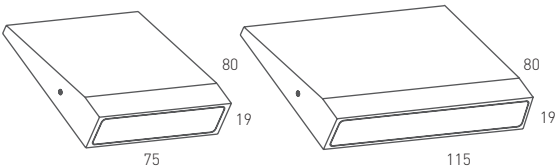


SQUARE FOOTLIGHT SPECIFICATIONS								
CODE	DESCRIPTION	DIMENSIONS (mm)	WATTS	INPUT	CUT OUT	COLOUR TEMP.	FINISH	IP RATING
LOWLW1WWW	Wedge footlight light	75(w) x 19(d) x 80(h)	1.2W	350mA	N/A	3000K	White	IP54
LOWL3WWW	Wedge footlight light	115(w) x 19(d) x 80(h)	2.6W	700mA	N/A	3000K	White	IP54


LED Foot Lights - High Efficiency




NAPIER
WLNAP3WIP54



AUCKLAND
WLAUCK4WIP54

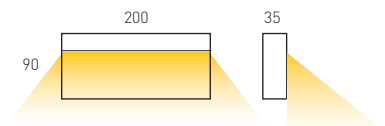

WELLINGTON
WLWELL3WIP54

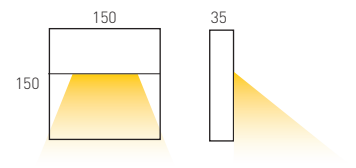

SPECIFICATIONS

CODE	WATTS	DIMENSIONS (mm)	CRI	LUMENS	CCT	MATERIAL	IP Rating	INPUT VOLTAGE	Colour
WLNAP3WIP54	3W	Ø150 x 35	90+	350	2700K - 6500K	Die cast aluminium with acrylic diffuser	IP54	24VDC	Charcoal. Other colours available
WLAUCK4WIP54	4W	90 x 200 x 35	90+	450	2700K - 6500K		IP54	24VDC	
WLWELL3WIP54	3W	150 x 150 x 35	90+	350	2700K - 6500K		IP54	24VDC	

LED Above Ground Outdoor Lights - 12vDC



LASLSS8WWDL12V



LASLLS8WWDL12V




LASLSB8WWDL12V



LASLLB8WWDL12V

ALL MODELS

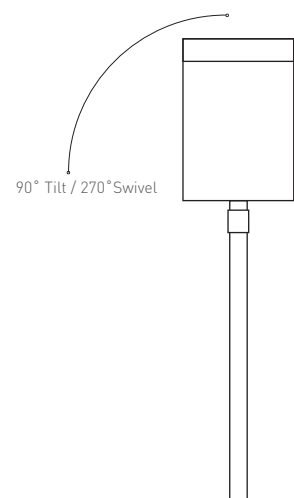

SPECIFICATIONS

CODE	WATTS	DIMENSIONS (mm)	BEAM ANGLE	LUMENS	MATERIAL	IP Rating	INPUT VOLTAGE	Replacement bulb
LASLSS8WWDL12V	8W	Ø63 x 111 x 245(stalk)	60°	360	S/Steel	IP65	12VDC	MR16
LASLLS8WWDL12V	8W	Ø63 x 86 x 476(stalk)	60°	360	S/Steel	IP65	12VDC	MR16
LASLSB8WWDL12V	8W	Ø60 x 111 x 285(stalk)	60°	360	Aluminium	IP65	12VDC	MR16
LASLLB8WWDL12V	8W	Ø63 x 86 x 476(stalk)	60°	360	Aluminium	IP65	12VDC	MR16

LED Above Ground Outdoor Lights -24VDC




- Silver
- Black



GLST3W(CCT)IP65

Colour Options



2700K 3000K 4000K 6000K

Watts



3W

Lumens



150-180

Rating




IP65

Beam Angles



10°/20°/30°/40°/60°

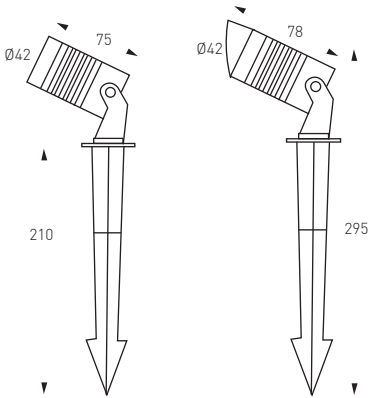

GLST3W(CCT)IP65




- Silver
- Black



GLST5W(CCT)IP65

Colour Options



2700K 3000K 4000K 6000K

Watts



5W

Lumens



350-400

Rating




IP65

Beam Angles



25°/38°/60°

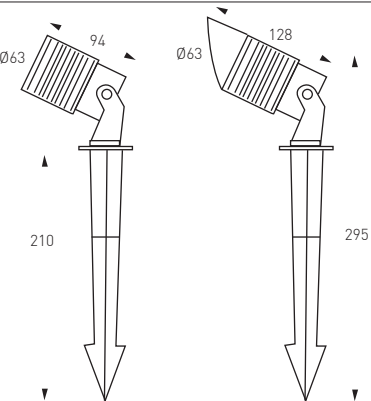

GLST5W(CCT)IP65




- Silver
- Black



GLST9W(CCT)IP65

Colour Options



2700K 3000K 4000K 6000K

Watts



9W

Lumens



350-400

Rating




IP65


Beam Angles



25°/38°/60°

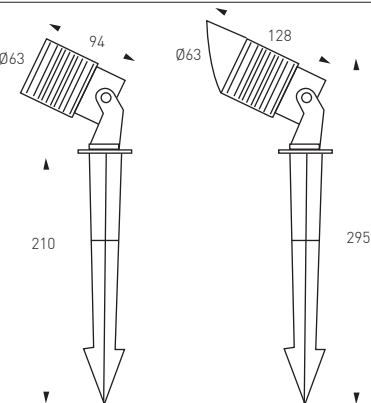

GLST9W(CCT)IP65

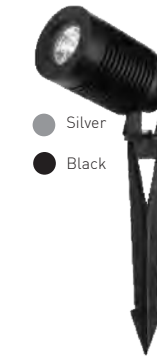


- Silver
- Black



GLST15W(CCT)IP65

Colour Options



2700K 3000K 4000K 6000K

Watts



15W

Lumens



1050-1200

Rating




IP65

Beam Angles




25°/38°/60°

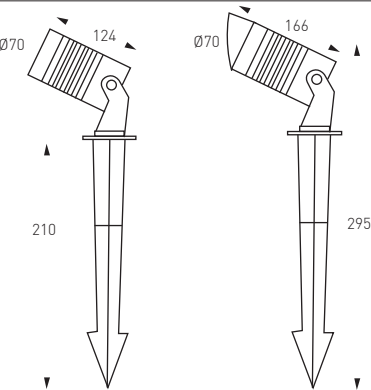

GLST15W(CCT)IP65

WATTS	MATERIAL	INPUT	CHIP
3W	Aluminium	24VDC	OSRAM
5W,9W, 15W	Aluminium	24VDC	CREE




Optional Honeycomb filter
on all models


LED Garden Spot Lights - Plate Mounted - 24VDC




Colour Options				Watts	Lumens	Rating	Beam Angles
				 3W 5W	 150-180	 IP65	 10°/20°/30°/40°/60°




Colour Options				Watts	Lumens	Rating	Beam Angles
				 3W 5W	 150-180	 IP65	 10°/20°/30°/40°/60°




Colour Options				Watts	Lumens	Rating	Beam Angles
				 9W	 350-400 630-720	 IP65	 25°/38°/60°




Colour Options				Watts	Lumens	Rating	Beam Angles
				 9W	 350-400 630-720	 IP65	 25°/38°/60°




Colour Options				Watts	Lumens	Rating	Beam Angles
				 15W	 1050-1200	 IP65	 25°/38°/60°



Colour Options				Watts	Lumens	Rating	Beam Angles
				 15W	 1050-1200	 IP65	 25°/38°/60°



WATTS	MATERIAL	INPUT	CHIP
3W	Aluminium	24VDC	OSRAM
5W, 9W, 15W	Aluminium	24VDC	CREE



Optional Honeycomb filter
on all models

LED On Wall Outdoor Lights



WLGAR2X6WIP54 (GARDA)
Surface mounted
Fixed



LOWLDF8W
Surface mounted
Fixed



LOWLUD2X8W
Tubular surface mounted
Up/Down



LOWLD1X8W
Tubular surface mounted
Single adjustable




LOWLDA2X8W
Tubular surface mounted
Double adjustable


SPECIFICATIONS

CODE	POWER	LUMENS	MATERIAL	DIMENSIONS(mm)	RATING	COLOUR TEMP.	INPUT VOLTAGE	BEAM ANGLE
WLGAR2X6WIP54	2 x 6W	900	Aluminium	170 x 90 x 30	IP54	3000K Other CCT available	240V	120°
LOWLUD2X8W	2 x 8W	760	S/Steel 304	208 x 90	IP65	2700/4000K	240V/12V	60°
LOWLD1X8W	8W	380	Alum/S.Steel or copper	Housing:110 x Ø62.5	IP66	2700/4000K	240V/12V	60°
LOWLDA2X8W	2 X 8W	760	Alum/S.Steel or copper	Housing:110 x Ø62.5	IP66	2700/4000K	240V/12V	60°
LOWLDF8W	8W	380	Aluminium	L:107 x W:115 x D:147mm	IP44	2700/4000K	240V	60°


LED On Wall Outdoor Lights

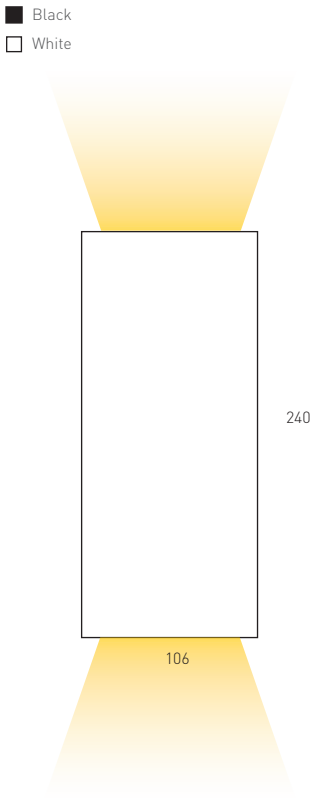


OWELETRA (Black)
Surface mounted
Fixed

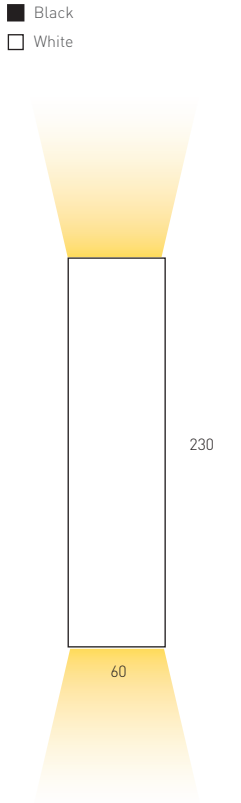

OWBONUCCI
Surface mounted
Fixed

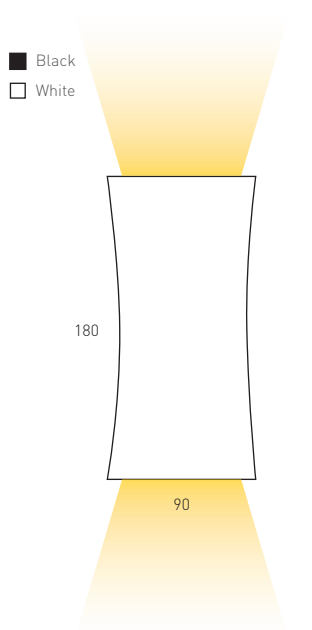

WLMICHIGAN
Surface mounted
Fixed

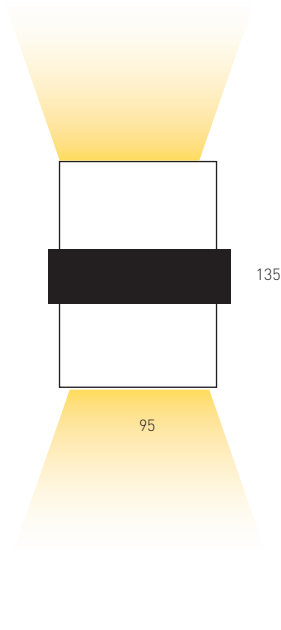

WLGENISIS
Surface mounted
Fixed

SPECIFICATIONS								
CODE	POWER	LUMENS	MATERIAL	DIMENSIONS(mm)	RATING	COLOUR TEMP.	BEAM ANGLE	INPUT VOLTAGE
OWELETRA	2 x 3W	530	Aluminium	170 x 90 x 30	IP54	2700K/3000K	36°	240V
OBONUCCI	2 x 5W	750	Aluminium	60 x 230	IP65	2700K/3000K	36°	240V
WLMICHIGAN	8W	380	Aluminium	90 x 180	IP66	3000K Other CCT available	60°	240V
WLGENISIS	2 x 6W	900	Aluminium + Glass	95 x 135	IP54	3000K Other CCT available	60°	240V

LED FLOOD LIGHTS



FLHYUN20W
20W LED



FLHYUN50W
50W LED



- Waterproof, warm white floodlight
- Supplied with 1m flexible cable - Simple "plug and play"
- IP65 rated

SPECIFICATIONS							
CODE	DESCRIPTION	DIMENSIONS (mm)	WATTS	LUMENS	COLOUR TEMP.	INPUT VOLTAGE	IP Rating
FLHYUN20W	Outdoor floodlight	190 x 45 x 215	20	1800	3000K	240VDC	IP65
FLHYUN50W	Outdoor floodlight	235 x 450 x 245	50	4500	3000K	240VDC	IP65

LED ANTIQUE FINISH OUTDOOR LIGHTING




BRASSUP/DOWN

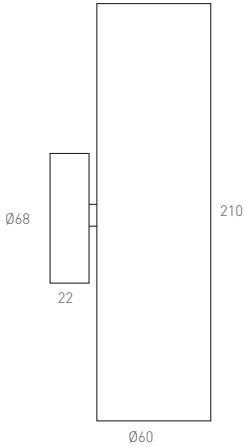

BRASSUP/DOWN			
WATTS	COLOUR TEMP.	LUMENS	RATING
2 x 5	2700K	2 x 450	IP65
Solid brass with antique finish			




BRASSINGLE

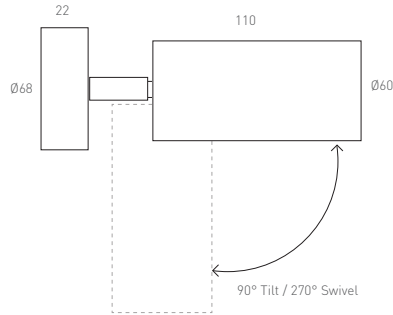

BRASSINGLE			
WATTS	COLOUR TEMP.	LUMENS	RATING
5	2700K	450	IP65
Solid brass with antique finish			




BRASSTWIN

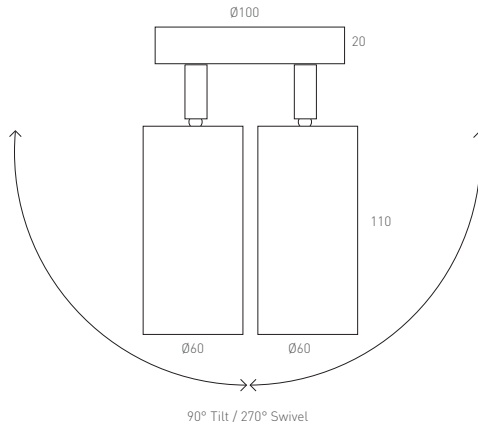

BRASSTWIN			
WATTS	COLOUR TEMP.	LUMENS	RATING
2 x 5	2700K	2 x 450	IP65
Solid brass with antique finish			





CLAMM



CLAMM			
WATTS	COLOUR TEMP.	LUMENS	RATING
3.5	2700K	300	IP54
12V DC Heavy duty antique brass			





FYRBOX/L



FYRBOX/L			
WATTS	COLOUR TEMP.	LUMENS	RATING
3	3000K	240	IP65
12VDC Solid, antique brass			




FYRBOX/P



FYRBOX/P			
WATTS	COLOUR TEMP.	LUMENS	RATING
2x 3W	3000K	2 x 240	IP65
12VDC Solid, antique brass			




COACHMAN

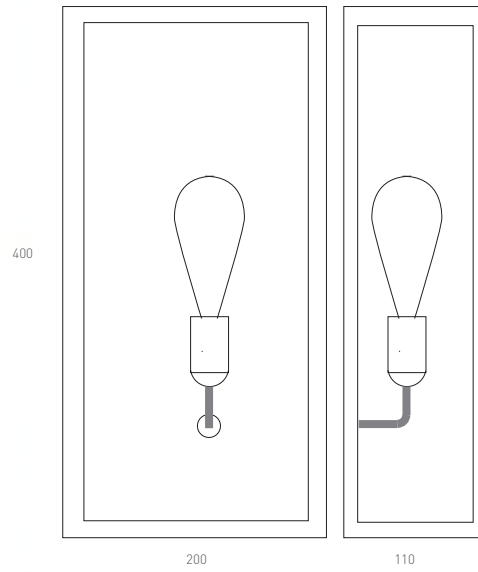

COACHMAN			
LAMP	WATT	LUMENS	RATING
A60 / Edison teardrop	6W	600	IP54
A classically designed antique brass wall sconce, this piece adds a sense of simplicity to your room whilst maintaining its style.			




NAUTILUS

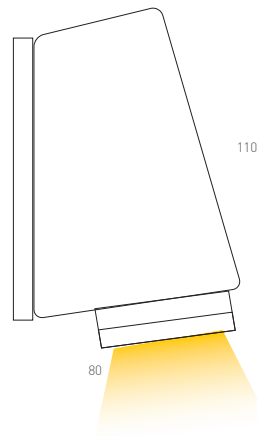

NAUTILUS			
LAMP	WATT	LUMENS	RATING
GU10	5W	450	IP54
2700K Made from solid antique brass			




BUNKAR

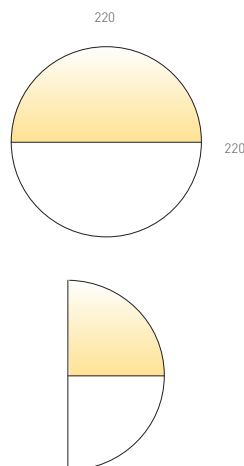

BUNKAR			
LAMP	WATT	LUMENS	RATING
G45 E27 LED	5W	400	IP54
2700K Made from solid antique brass			



PATHWEI

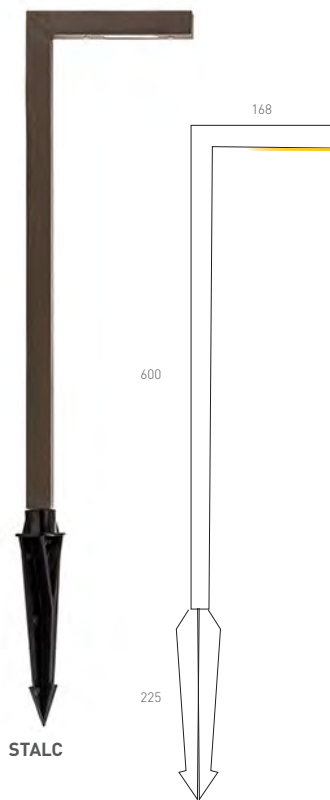


STALC

PATHWEI			
WATTS	COLOUR TEMP.	LUMENS	RATING
3.5	2700K	300	IP54
12VDC Antique Brass finish			

STALC			
WATTS	COLOUR TEMP.	LUMENS	RATING
7	3000K	500	IP54
12VDC Antique Bronze finish			




LUMINATOR

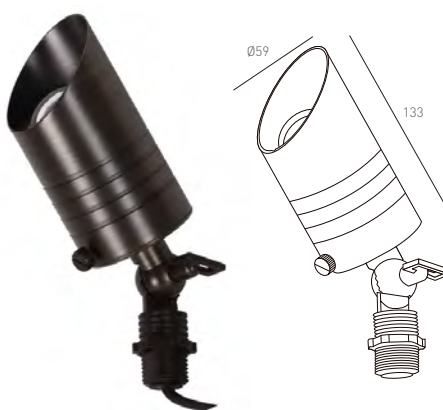

LUMINATORI

LUMINATOR			
WATTS	COLOUR TEMP.	LUMENS	RATING
5	2700K	450	IP65
12VDC Weathered bronze			

LUMINATORI			
WATTS	COLOUR TEMP.	LUMENS	RATING
5	2700K	450	IP65
12VDC Weathered bronze			




Optional
225mm spike



Optional
305mm extension rod




LOOVERLIGHT

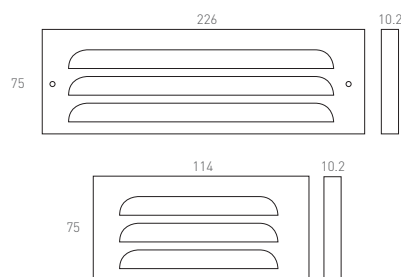

LOOVERLITE (2 sizes)			
WATTS	COLOUR TEMP.	LUMENS	RATING
4	2700K	75	IP65
12VDC Weathered bronze			



LIGHTBAR

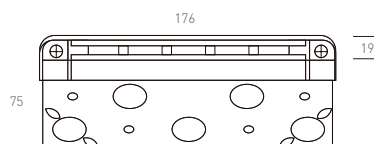

LIGHTBAR			
WATTS	COLOUR TEMP.	LUMENS	RATING
1.25	2700K	60	IP65
12VDC Weathered bronze			





TecLed Pty Ltd

Unit 4, 61 - 71 Beauchamp Road, Matraville NSW 2036

Telephone: (02) 9317 4177 Facsimile: (02) 9317 3544

Email: sales@tecled.com.au