
TEC=LED





Fitting Options

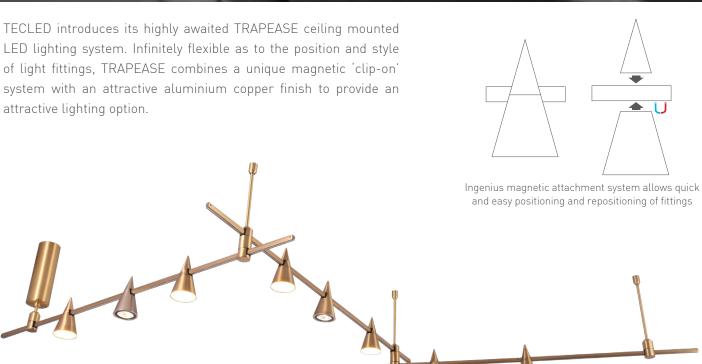

Suspension Options










Components



Assembly and Combinations

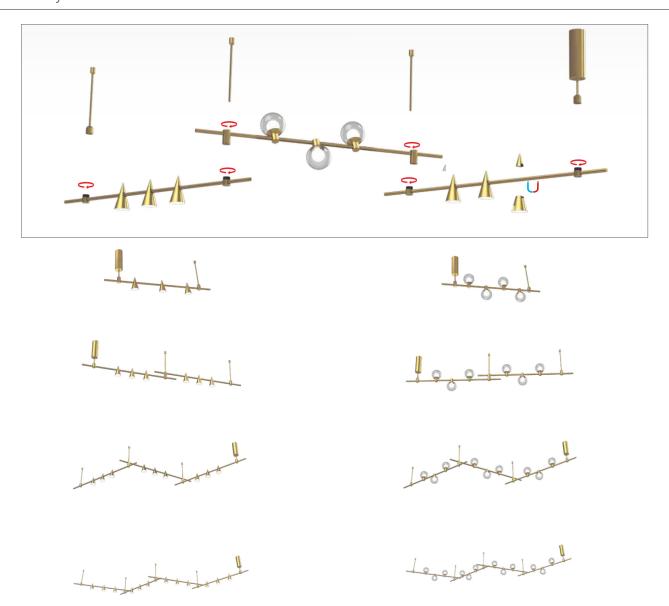

SPECIFICATIONS										
Code	Description	Input	Colour Temp.	Watts	CRI	Lumens	Beam angle	Dimensions	Colour	IP Rating
LTRPCA	Conical (Diffused)	DC24V	2700K, 3000K, 4000K	5W	>85	300	120°	106.5h x Ø60mm	Copper	IP20
LTRPCL	Conical (Reflector)	DC24V	2700K, 3000K, 4000K	5W	>85	300	24°, 45°	106.5h x Ø60mm	Copper	IP20
LTRPGD	Glass Domed fitting	DC24V	2700K, 3000K, 4000K	5W	>85	300	120°	130h x Ø100mm	Copper	IP20



TecLed Pty Ltd

Unit 4, 61 - 71 Beauchamp Road, Matraville NSW 2036 Telephone: (02) 9317 4177 Facsimile: (02) 9317 3544

Email: sales@tecled.com.au