



MAMBO XL SNAKE LIGHT

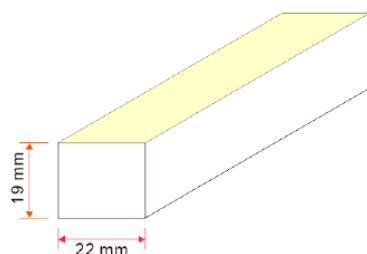



Note: Unless otherwise specified, the tolerance of the dimensions is $\pm 0.3\text{mm}$.

C-SFR-F2219B-VB




PRODUCT SPECIFICATIONS	
Code	LSNAKEMAMBOXL-VB
Watts	16.5W
CCT	2200/2700/3000/3500/4000/5700K
Lumens (lm)	>950/1000/1000/1050/1050/1000lm
CRI	>80
Beam Angle (deg)	120
Dimensions (mm)	19mm x 22mm
Cutting length	Min 50mm, Max 10m
Rating	IP65-IP68
Dimmable	Optional
Voltage	24V
Working temperature	$\sim 40\sim 55^{\circ}\text{C}$
Installation temperature	$\sim 40\sim 45^{\circ}\text{C}$
Suitable for	Outdoor or Indoor

TEC LED

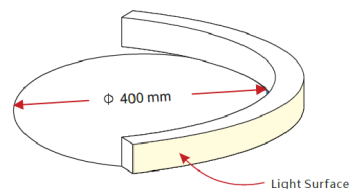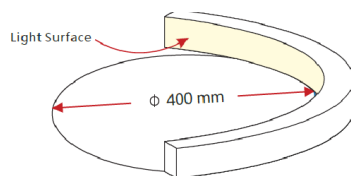


Injection-moulded Front Connector (bottom)

Connects light to power supply with pre-installed bottom feed cable IP68. Available in 0.3m, 1m, 3m, 5m, 10m lengths.

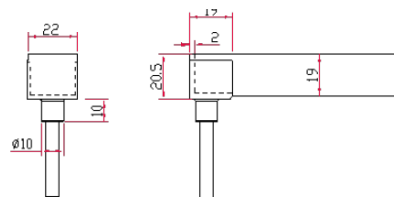


Injection-moulded Front Connector (side)

Connects light to power supply with pre-installed side feed cable IP68. Available in 0.3m, 1m, 3m, 5m, 10m lengths.

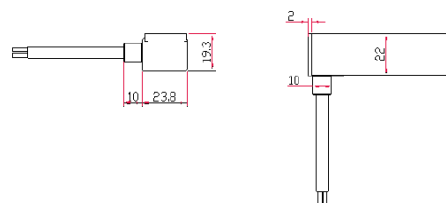


Injection-moulded Front Connector (end)

Connects light to power supply with pre-installed end feed cable IP68. Available in 0.3m, 1m, 3m, 5m, 10m lengths.

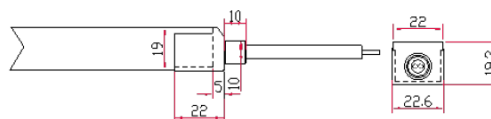


Injection-moulded End Cap


Pre-installed termination protection of the light, IP68.

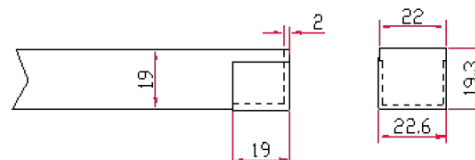

Anti-Wracking Ferrule

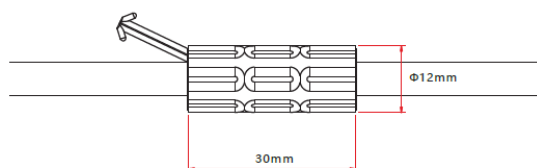

Serrate Aluminium Profile

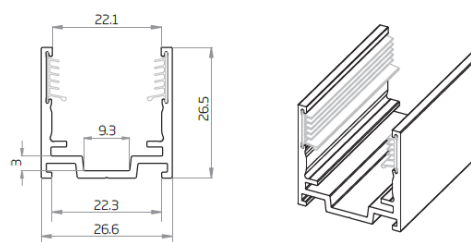

Note: Unless otherwise stated, the tolerance of the profile is ± 0.5 mm.

TEC=LED

TecLed Pty Ltd

Unit 4, 61-71 Beauchamp Rd

Matraville 2036, NSW

Telephone: (02) 9317 4177

Email: sales@tecled.com.au