
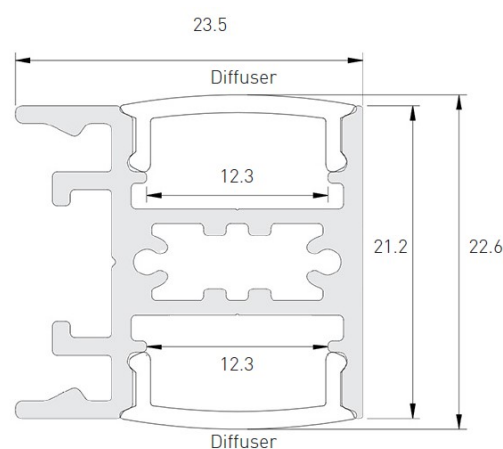


MIN UP DOWN

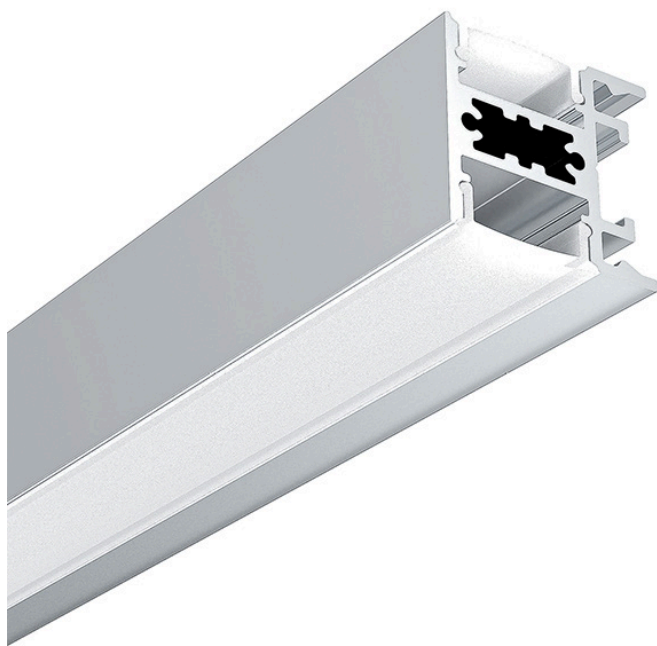

CODE	WATTS/M	LUMENS	CRI	OPERATIONAL VOLTAGE	FINISH	CCT	DIMMABLE	BEAM ANGLE
PROMINUPDOWN	14.4W x 2	1100 x 2	>90	12V	Standard	2400-6500K DTW Sunset DIM	TRIAC/DALI/ 0-10v	2 x 120°
	19.2W x 2	1700 x 2		24V				
	22W x 2	2300 x 2						

Get in touch

U4 / 61-71 Beauchamp Rd,
Matraville NSW 203602 9317 4177
0425 350 698sales@tecled.com.au
Victoria@tecled.com.au

Follow us

