


LED PROFILE MINI COVER

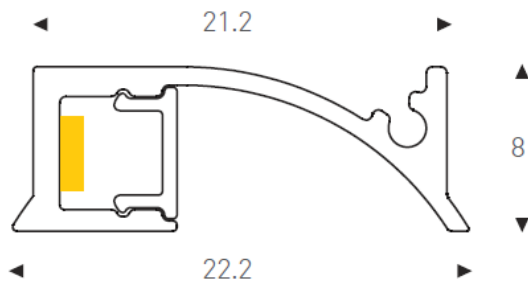

CODE	WATTS	CCT	CRI	OPERATIONAL VOLTAGE	FINISH	LUMENS	DIMMABLE	BEAM ANGLE
PROMINICOVER	14.4W/M	2700K 3000K 4000K 6500K	>90	12V	Standard Silver	1100/M	TRIAC/DALI/0-10v	90°