

TEC=LED



2023 Snake Lights Autumn Releases




DOUBLEDOME




A unique and innovative Snakelight casting light in two opposing directions, forming twin 160° glows.
Flexible enough to form around a 120° bend yet robust enough for outdoor use.
Available in a range of colour temperatures as well RGB

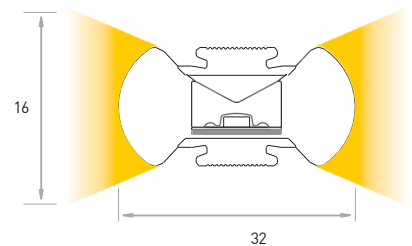


Horizontal bend



120mm minimum
bending diameter

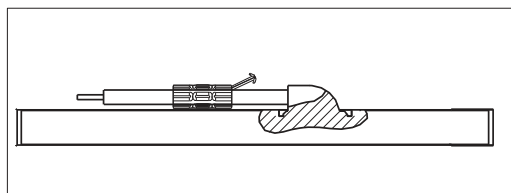

Rear cable entry

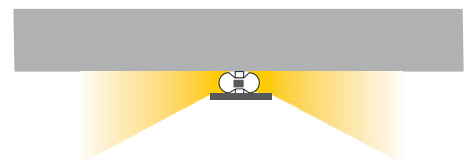

Typical installation
Plan





15

Mounting clip




Corrosion resistant, easy-to-use mounting clips

DOUBLEDOME SPECIFICATIONS								
CODE	WATTS	LUMENS	COLOUR TEMP	CRI	MIN CUTTING LENGTH(mm)	MAX RUNNING LENGTH(m)	RATING	BEAM ANGLE
SLDBLME	9W	480 300	2200K/2700K/3000K/3500K/4000K/5700K RGB	>90	83.3 125	13m single entry 26m double entry	IP67	160° + 160°

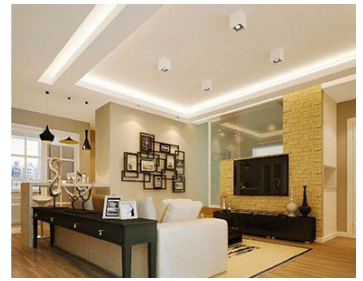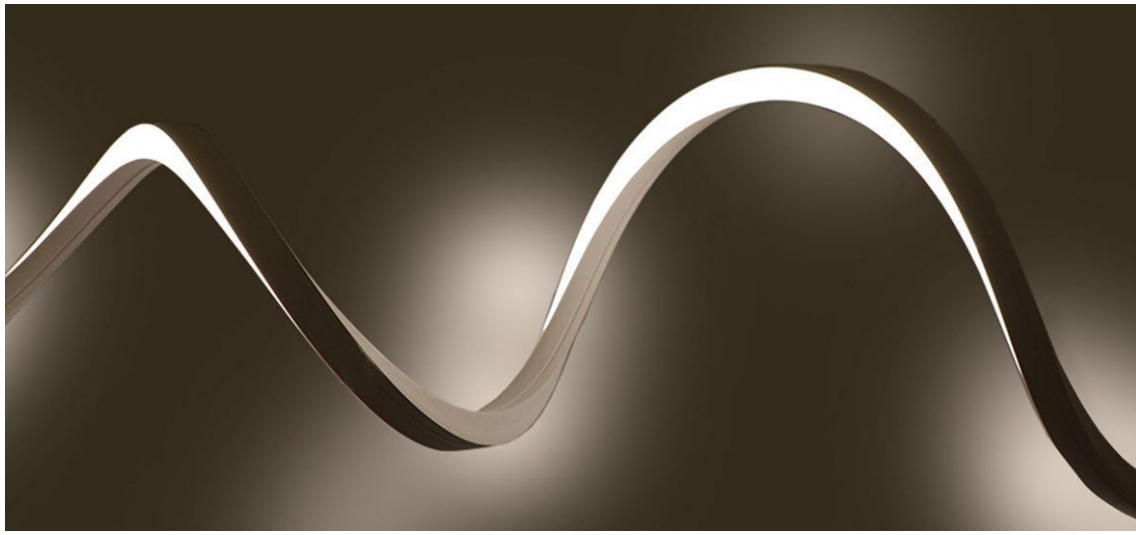


MINI BIDIRECT

A highly flexible, dual bend Snakelight offering lighting solutions to a myriad of planes, curved and complex decorative architectural surfaces. With compact 10mm x 10mm dimensions, the Mini Bidirect can be fitted to the tightest of cavities.

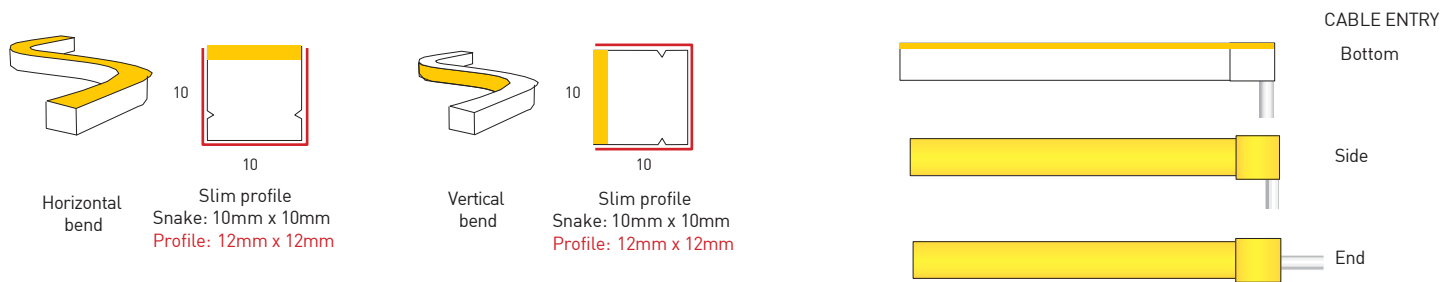

INSTALLATION

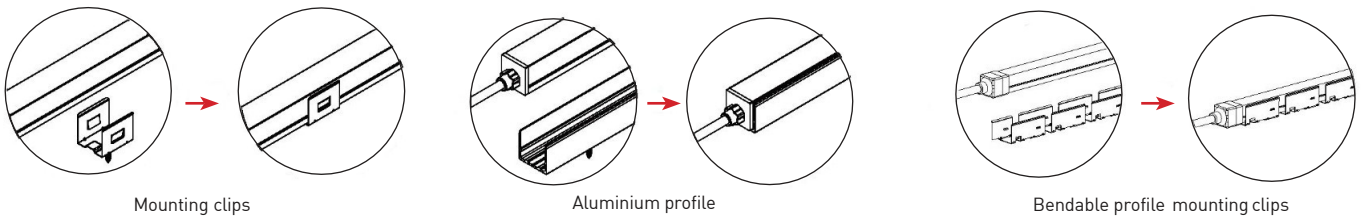


MINI BIDIRECT SPECIFICATIONS

CODE	WATTS p/m	LUMENS	VOLTAGE	LED QTY	COLOUR TEMP	CRI	MIN CUTTING LENGTH(mm)	MAX LENGTH(m)	RATING	BEAM ANGLE
SLMINIBI	8W	530lm/m	DC24V	226 LEDS/m	2700K/3000K/3500K/ 4000K/5000K/6000K	>90	Free cutting to anylength	5	IP67	120°

BIGANA

An all-round, tough simple, solution for all applications. One of our largest Snakelights

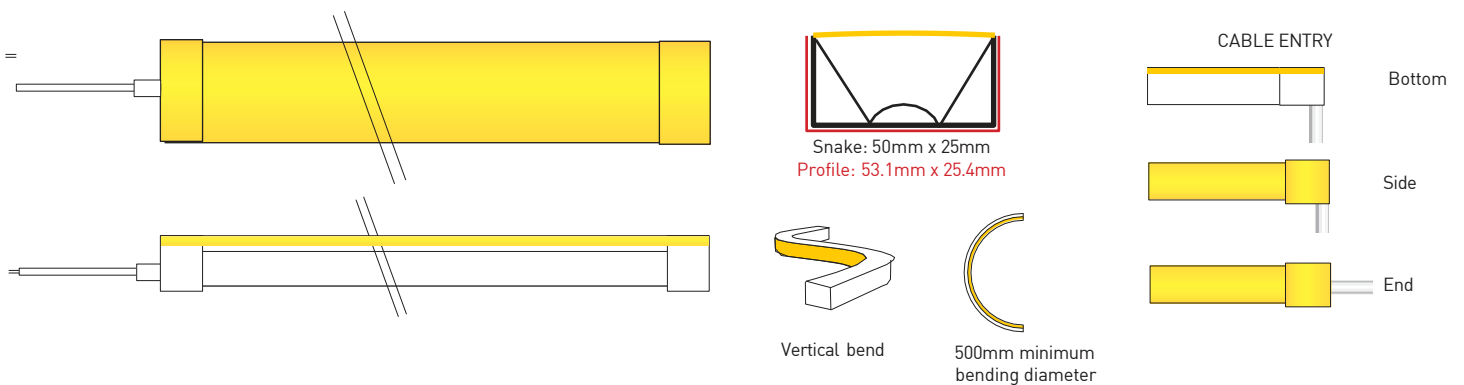

BIGANA 5025 SPECIFICATIONS


CODE	WATTS p/m	LUMENS	VOLTAGE	COLOUR TEMP	CRI	MIN CUTTING LENGTH(mm)	MAX LENGTH(m)	RATING
SLBIGANA	15W	792-869	DC24V	2700K/3000K/4000K/6000K CCT, RGB	>90	50mm	12	IP67



MAMBO XL

Our brightest Snakelight series offering a choice of vertical or horizontal bending.

MAMBO XL VB



Snake: 19mm x 22mm
Profile: 20mm x 23mm




Vertical bend




400mm minimum
bending diameter

ALUMINIUM MOUNTING PROFILE




Serrated



26.6



Flange Serrated



26.6

MAMBO XL HB



Snake: 22mm x 22mm
Profile: 23mm x 23mm



Horizontal bend



400mm minimum
bending diameter

ALUMINIUM MOUNTING PROFILE





Serrated
26.6 x 26.5




Flange Serrated
26.6 x 26.5 x 36.2



Bendable
26.6 x 26.5

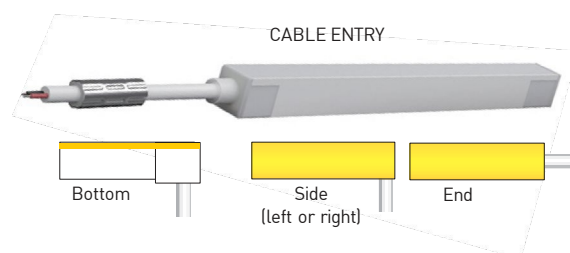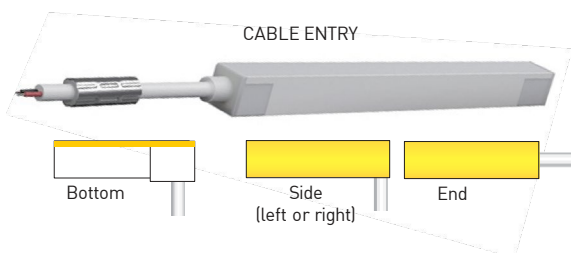

MAMBA XL SPECIFICATIONS								
CODE	WATTS p/m	LUMENS p/m	VOLTAGE	COLOUR TEMP	CRI	MIN CUTTING LENGTH(mm)	UNIT LENGTH(m)	RATING
SLMAMBOXLVB	12W/16.5W	900-1400	DC24V	2200K/2700K/3000K/3500K/4000K/5700K CCT, RGB, RGBW	>80	50mm	Single run: 15m	IP67
SLMAMBOXLHB	12W/16.5W	700-1100	DC24V	2200K/2700K/3000K/3500K/4000K/5700K CCT, RGB, RGBW	>80	50mm	Single run: 15m	P67

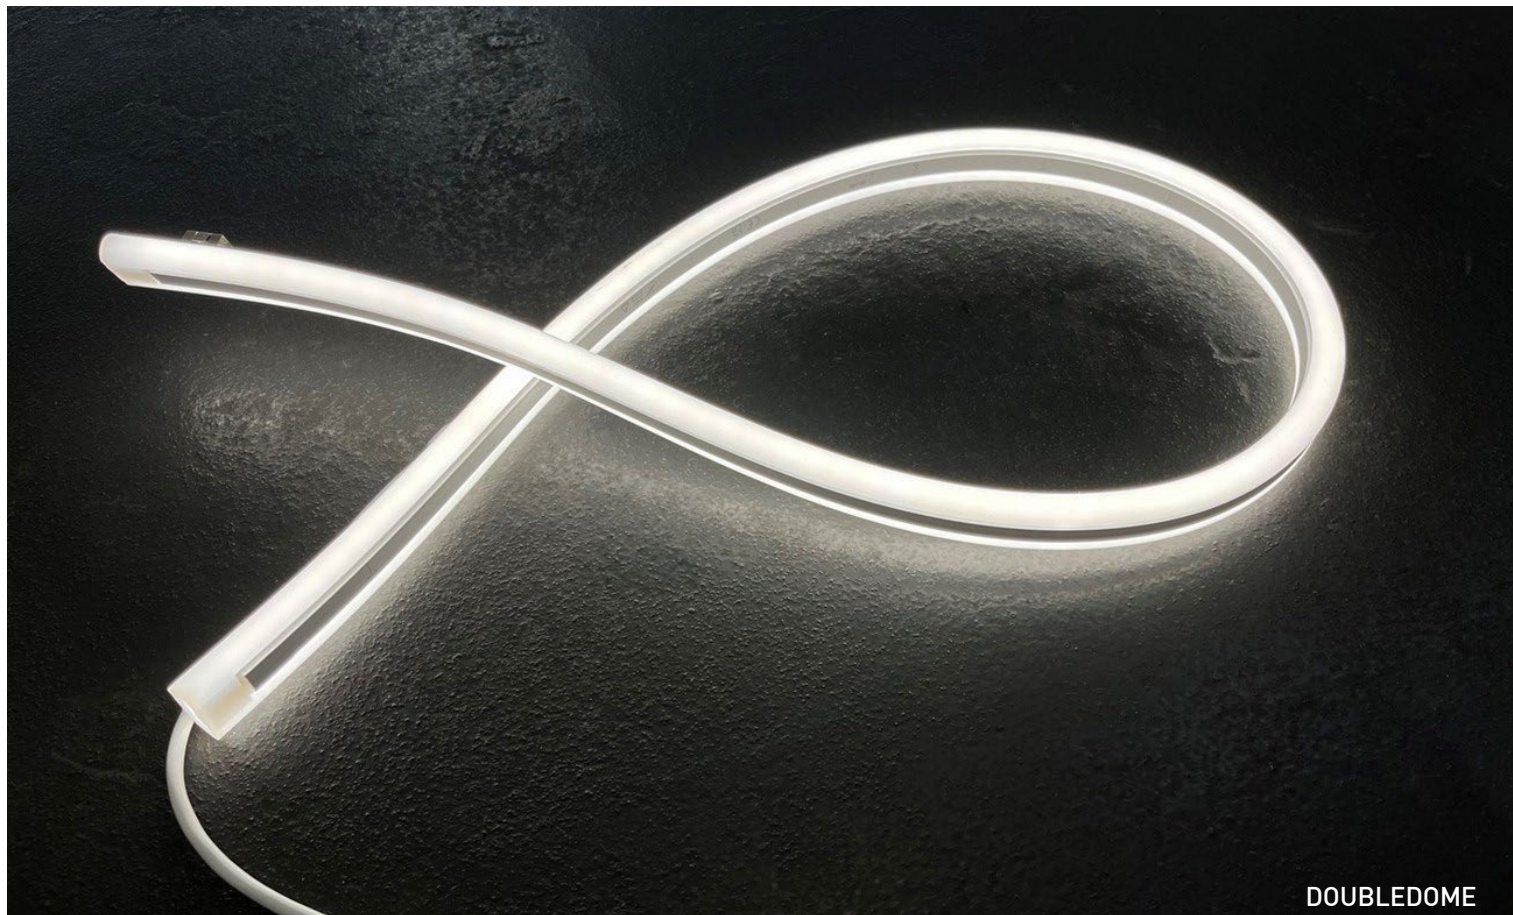

DOUBLEDOME



BIGANA

TEC=LED

TecLed Pty Ltd
Unit 4, 61 - 71 Beauchamp Road, Matraville NSW 2036
Telephone: (02) 9317 4177 Facsimile: (02) 9317 3544
Email: sales@tecled.com.au

LED[®]
SNAKE