


LED PROFILE NIMITZ




IP65

NIMITZ
PRONIMITZ
20W p/m, 30W p/m

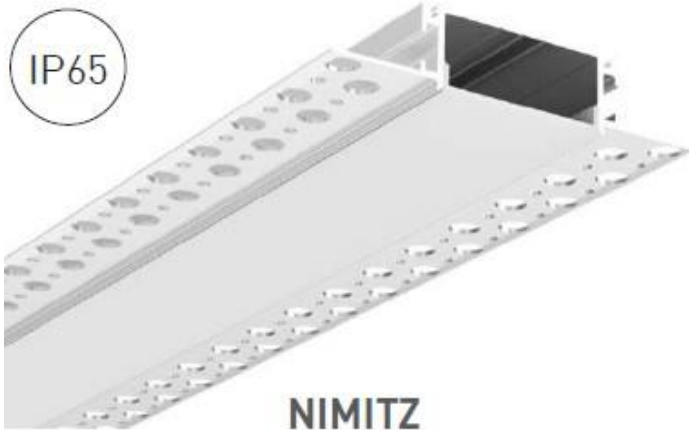

Installed in flat vertical or horizontal surface

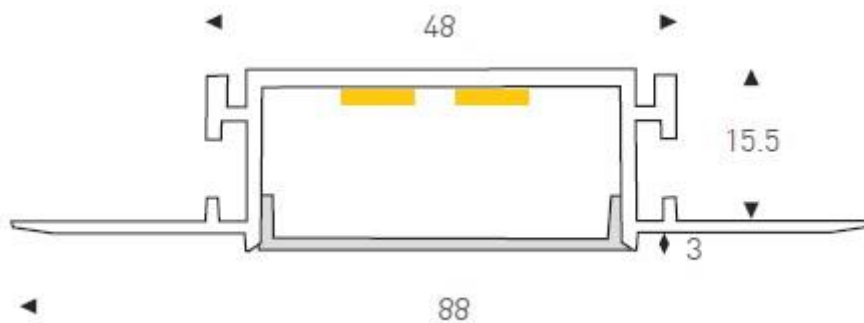

CODE	WATTS/M	LUMENS/M	CRI	VOLTS	FINISH	CCT	DIMMABLE	BEAM ANGLE
PRONIMITZ	20W	1700	>90	24V	Standard Silver	2700K	TRIAC/DALI/0-10v	120°
	30W	2200				3000K 4000K 6500K		