

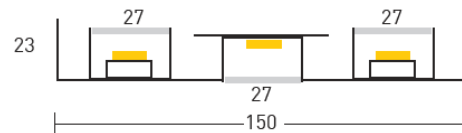


LED PROFILE PLANQ

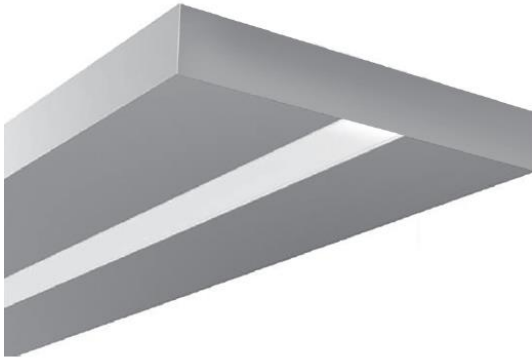

PLANQ PROPLANQ

LED aluminium rectangular profile, pmma opal or semi-clear matte diffuser.
 Down: 20W p/m. , Up: 2 x 10W p/m
 Up and down lighting Supplied with end caps
Mounting: Suspended
Colours: Black, anodised



CODE	WATTS/M	LUMENS/M	CRI	VOLTS	FINISH	CCT	DIMMABLE	BEAM ANGLE
PROAUR	Up: 2 x 10W	1700	>90	24V	Black/ Anodised	2700K	TRIAC/DALI/0-10v	120°
	Down: 20W	1700				3000K 4000K 6500K		