


RPLD

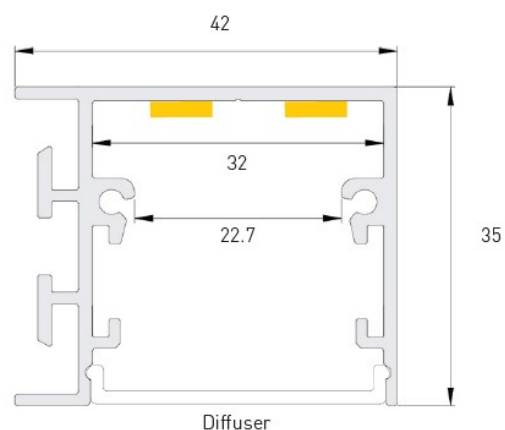

CODE	WATTS/M	LUMENS	CRI	OPERATIONAL VOLTAGE	FINISH	CCT	DIMMABLE	BEAM ANGLE
PRORPLD	2x14.4W	1100 x 2	>90	24V	Standard	2400-6500K DTW Sunset DIM	TRIAC/DALI/ 0-10v	120°
	2x19.2W	1700 x 2						

Get in touch

U4 / 61-71 Beauchamp Rd,
Matraville NSW 2036

02 9317 4177
0425 350 698

sales@tecled.com.au
Victoria@tecled.com.au

Follow us

