
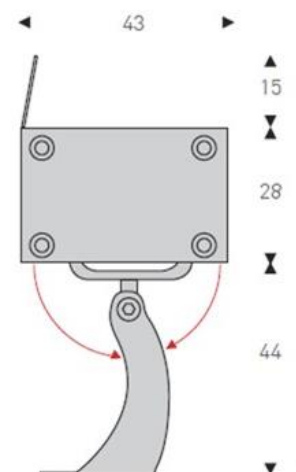


Standard Wall Washer

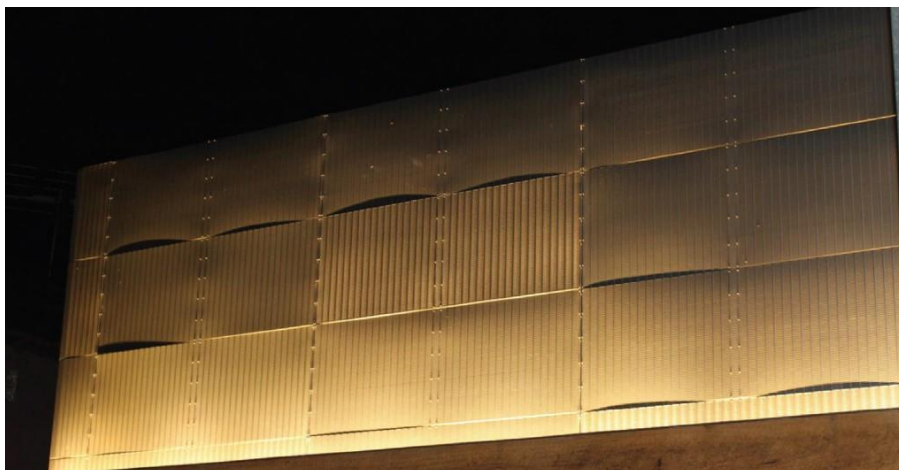

Shield available

- Simple plug-in solution
- Extensive colour spectrum
- 600mm and 1000mm lengths (Custom lengths available subject to MOQ)
- Supplied with mounting brackets
- 5m-10m wash distance (depending on beam angle)
- Dimmable via Triac/Dali/ 0-10/DMX

SPECIFICATIONS									
Code	Colour Temp	Watts	Lumens	Lamps p/unit	Beam angle	Dimensions mm (H x W x L)	Voltage	IP	Chip
TL-STCOMM600	2700-6000K	Single colour: 18W	1470	18	15°/30°/45°/60°/ Asymmetrical	72 x 43 x 600	DC24V	66	CREE
		RGB/ RGBW: 21W	1100						
TL-STCOMM1000	2700-6000K	Single colour: 30W	2520	36	15°/30°/45°/60°/ Asymmetrical	72 x 43 x 1000	DC24V	66	CREE
		RGB/ RGBW: 36W	1970						