


# TEC=LED



## LED Magnetic Track System

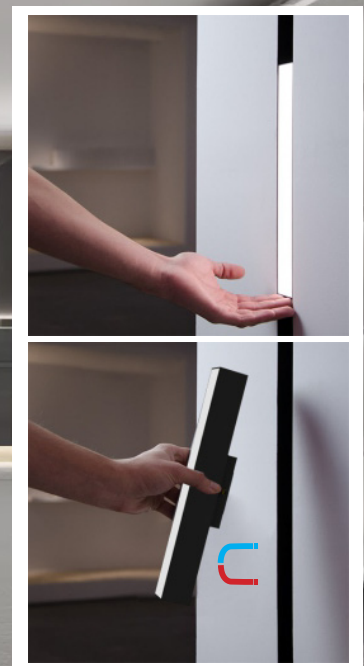

Combining easy installation with a linear style and a modular design system, TECLED's Magnetic Track lighting system offers a unique solution for space lighting.


## Track

The black, powder coated aluminium track carries the DC24V power feed, is available in 1000mm and 2000 lengths and offers 3 installation options:

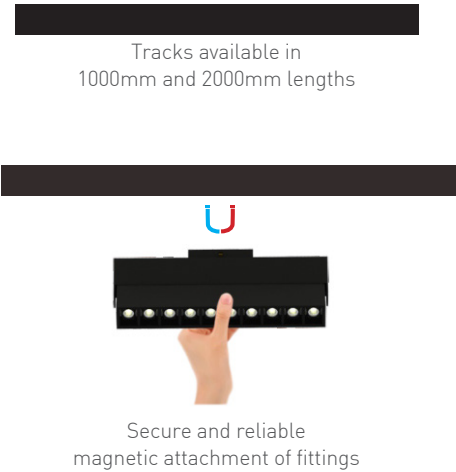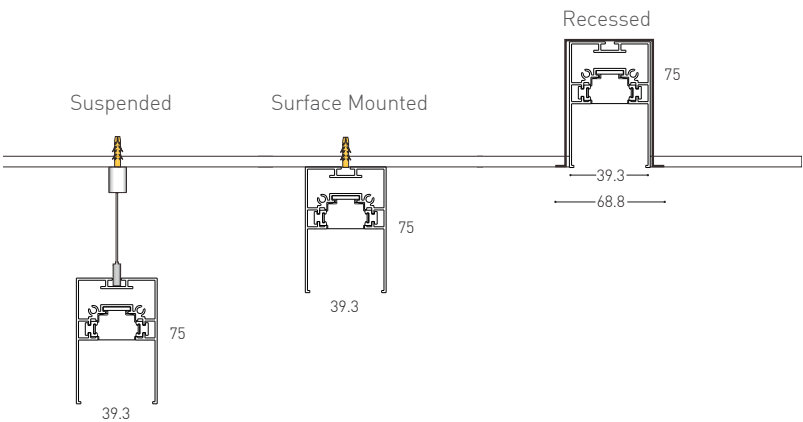


## Fittings

All fittings 'snap' securely into the magnetic track and can be repositioned or replaced anywhere along the length of the track.

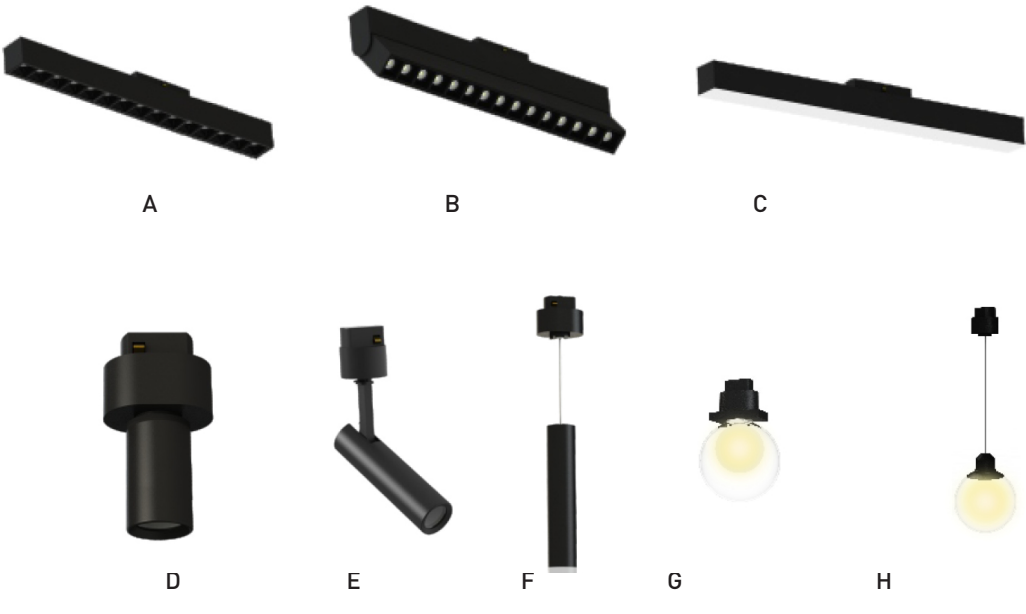

## Accessories

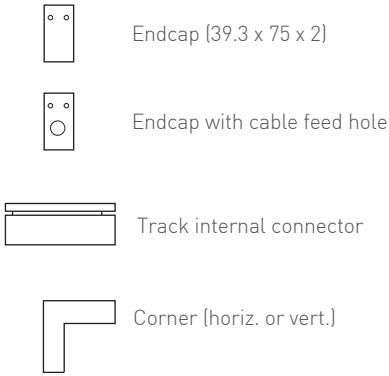

SPECIFICATIONS							
Ref	Description	Colour Temp.	Watts	CRI	Lumens	Beam angle	Dimensions
A	Fixed washer	2700K - 6500K	15W, 22W	>80	1200, 1760	15°, 30°, 45°	269/401 x 34 x 51.5
B	Adjustable washer	2700K - 6500K	15W, 22W	>80	1200, 1760	15°, 30°, 45°	269/401 x 34 x 116.9
C	Fixed Diffuser	2700K - 6500K	15W, 22W	>80	1200, 1760	120°	269/401 x 35 x 57.8
D	Spot	2700K - 6500K	5W	>80	400	35°, 45°	107.5 x Ø32
E	Adjustable spot	2700K - 6500K	5W, 10W, 15W	>80	400, 800, 1200	35°, 45°	189 x Ø32
F	Suspended Can	2700K - 6500K	15W	>80	1200	120°	1500 x Ø32
G	Ball Globe	2700K - 6500K	5W	>80	400	120°	151 x Ø100
H	Suspended Ball Globe	2700K - 6500K	5W	>80	400	120°	500 x Ø100

Note: 1 x live feed is required to be connected to the 24V power supply.