


LED PROFILE TOOB100



TOOB100 *PROTOOB100*

Circular profile with opal diffuser
0.5 - 3m lengths
19.2W p/m.. Supplied with end caps
Mounting: Suspended

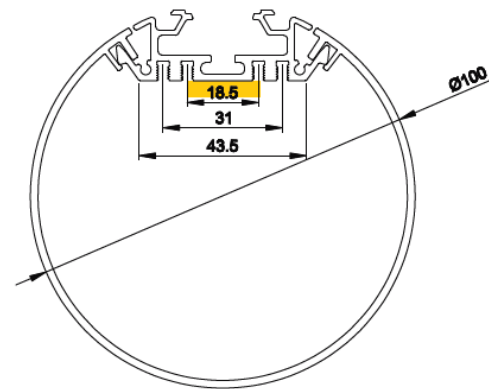

Ø100

CODE	WATTS	CCT	CRI	VOLTS	FINISH	LUMENS	DIMMABLE	BEAM ANGLE
PROTOOB100	19.2W/M	2700K 3000K 4000K 6500K	>90	24V	Standard Silver	1700lms/m	TRIAC DALI 0-10V	270°