

DELLA



Single
Circuit





3
Circuit

- Track mounted, swivel head
- Flicker-free
- Triac and DALI dimmable
- 240V input current




Single
Circuit

DELLA10W

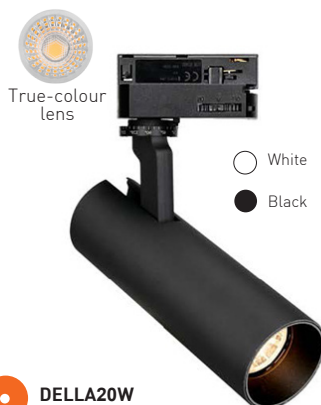


Single
Circuit

DELLA20W



3
Circuit

DELLA25W



Filter options



Honeycomb

Trim options



Black



White



Gold

DELLA SPECIFICATIONS

Code	Colour Temp.	Watts	Lumens	Beam angle	CRI	Rating	Dimmable	Colour
TLDELLA10W	2700K, 3000K, 4000K, Sunset Dim	10W	735 - 810	15°, 24°, 36°, 60°	>90	IP44	DALI, TRIAC	Black, White
TLDELLA20W	2700K, 3000K, 4000K	20W	1340 - 1470	15°, 24°, 36°, 60°	>90	IP44	DALI, TRIAC	Black, White
TLDELLA25W	2700K, 3000K, 4000K	25W	1705 - 1980	18°, 24°, 36°, 60°	>90	IP44	DALI, TRIAC	Black, White

ALFRESCO




Single
Circuit



3
Circuit



TRLAR15W
TRLAR19W

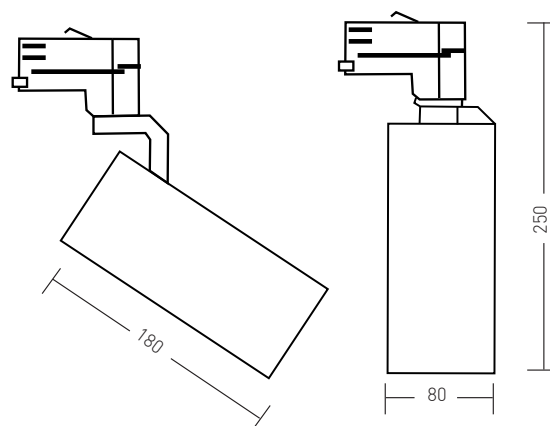

ALFRESCO SPECIFICATIONS

Code	Watts	Beam Angle	Cri	Dimensions (Mm)	Lumens	Rating	Colour Temp.	Dimming
TRLAR15W	15W	15°, 24°, 36°	<90	Ø80 x 180 x 250	1500	IP20	2700K, 3000K, 4000K CCT Adj.	Triac
TRLAR19W	19W	15°, 24°, 36°	<90	Ø80 x 180 x 250	1900	IP20	2700K, 3000K, 4000K CCT Adj.	DALI

TWISTY




Single
Circuit




- White
- Black
- Grey

TLTWISTYR9W
TLTWISTYR15W

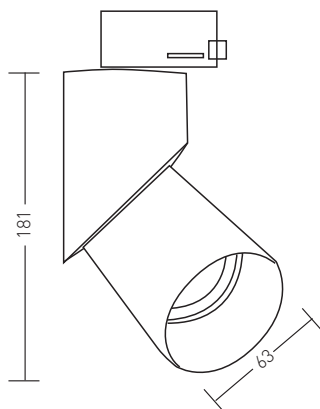

- White
- Black
- Grey

TLTWISTYSQ9W
TLTWISTYSQ15W

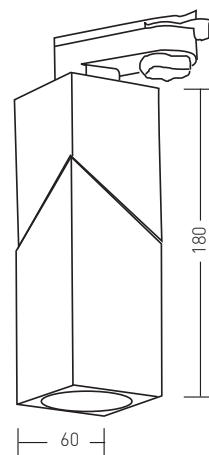

Baffle colour range (both models)



White

Gold

Black

TWISTY SPECIFICATIONS

Code	Colour Temp.	Watts	Lumens	Beam angle	CRI	Dimensions	Rating	Colour	Dimmable
TLTWISTYR9W/15W	2700K, 3000K, 4000K	9W/15W	765/1020	12°, 24°, 36°, 60°	>90	181mm x Ø63mm	IP20	Black, White, Grey	Triac
TLTWISTYSQ9W/15W	2700K, 3000K, 4000K	9W/15W	765/1020	12°, 24°, 36°, 60°	>90	180mm x 60mm	IP20	Black, White, Grey	Triac


TECH




3
Circuit



TECH319

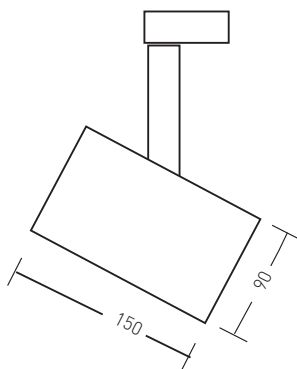

TECH328

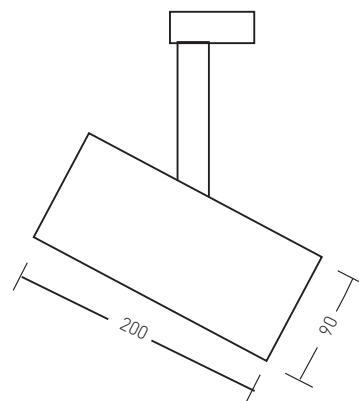


TWISTY SPECIFICATIONS

Code	Colour Temp.	Watts	Lumens	Beam angle	CRI	Dimensions	Rating	Colour	Dimmable
TECH319	2700K, 3000K, 4000K	19W	1900	15°, 24°, 36°	>90	150mm x 90mm	IP20	Black, White	Triac DALI
TECH328	2700K, 3000K, 4000K	28W	2800	15°, 24°, 36°	>90	200mm x 90mm	IP20	Black, White	

FALCTRACK



Single
Circuit

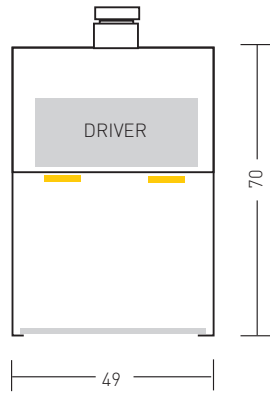


FALCTRACK SPECIFICATIONS								
Code	Colour Temp.	Watts	Lumens	Beam angle	CRI	Dimensions	Colour	Dimmable
FALCTRACK	2700K, 3000K, 4000K	40W p/m	3200	90°	>90	9mm x 70mm x 1200mm (max)	Black, White	TRIAC

TRACKS STANDARD

Single Circuit




Surface Mounted



LTLT1000MB/W; 2000MB/W
*Track available in 1000mm, 2000mm and 3000m lengths



Recessed

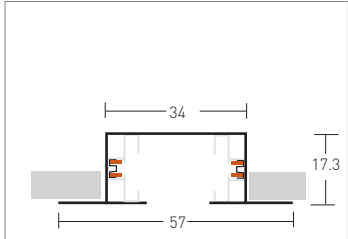


LTSINGLETRC1000
*Track available in 1000mm, 2000mm and 3000m lengths

3 Circuit




Surface Mount/Suspended

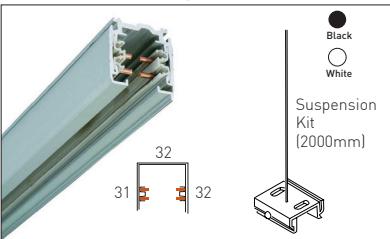

LTL3CT1000B/W; 2000B/W; 3000B/W






Recessed

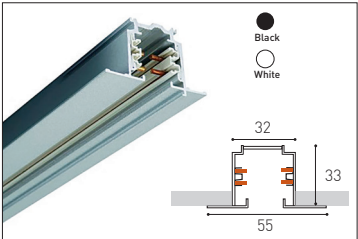

LTL3CTRC1000B/W; 2000B/W; 3000B/W



TRACKS DALI

Surface Mounted

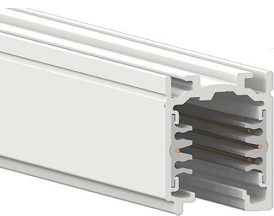

SURFACE MOUNTED			
Code	Unit length	Freq.	Voltage
DALISTRACK	1000mm, 2000m, 3000m, 4000m	50Hz	1A - 50V


Recessed

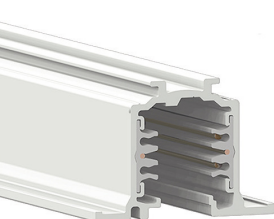



RECESSED			
Code	Unit length	Freq.	Voltage
DALIRTRACK	1000mm, 2000m, 3000m, 4000m	50Hz	1A - 50V

ACCESSORIES

Single Circuit Track Components ● Black ○ White

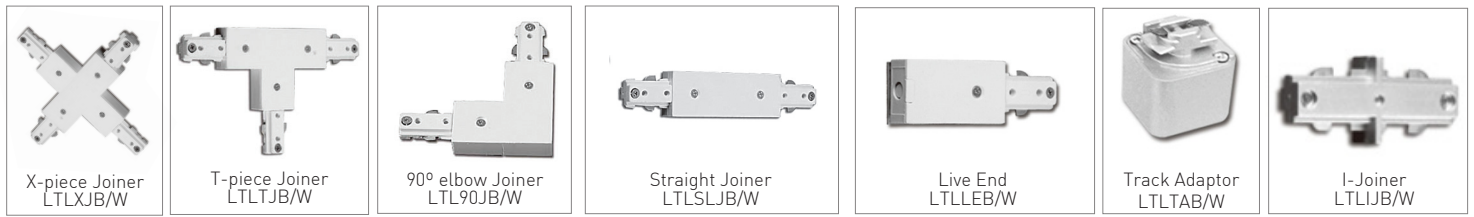

3 Circuit Track Components ● Black ○ White

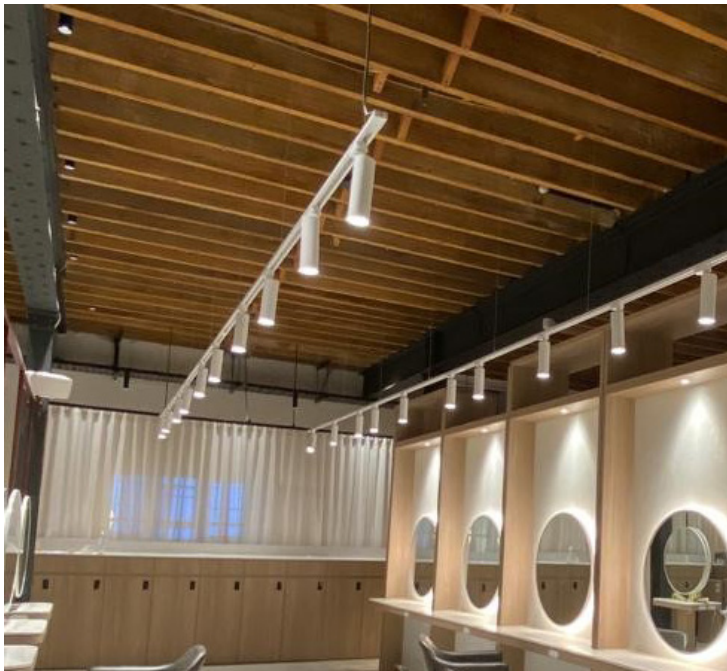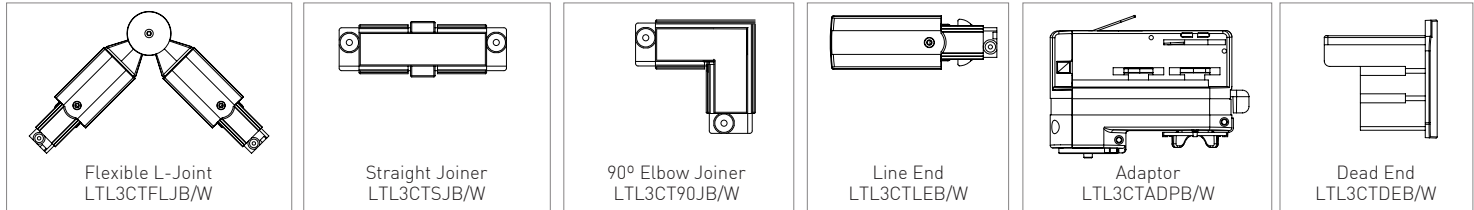

TEC=LED

TecLed Pty Ltd
 Unit 4, 61 - 71 Beauchamp Road, Matraville NSW 2036
 Telephone: (02) 9317 4177 Facsimile: (02) 9317 3544
 Email: sales@tecled.com.au