
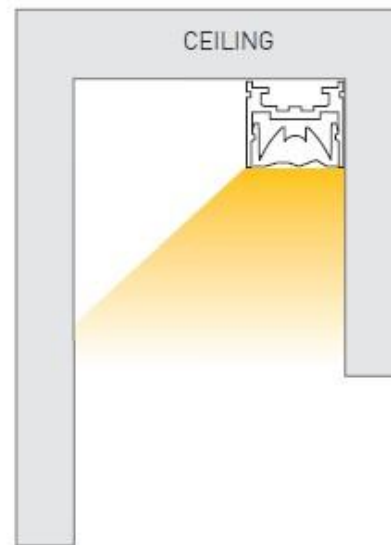
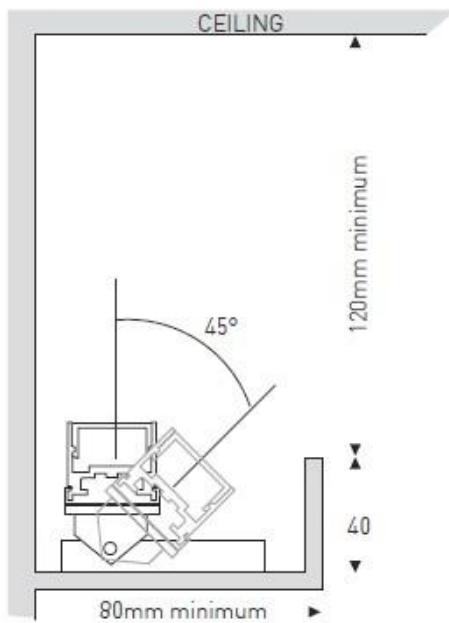







Versatile Asymmetrical Lens Extrusion

PROVASYML
14.4W p/m, 19.2W p/m

IP40

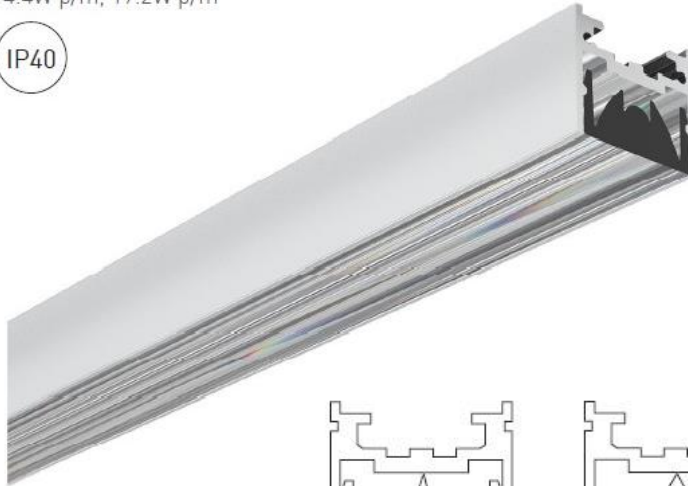

CODE	WATTS/M	LUMENS/M	CRI	VOLTS	FINISH	CCT	DIMMABLE	BEAM ANGLE
PROVASYML	14.4W	825	>95	12V	Silver	2700K	TRIAC/DALI/0-10v	30/60°
	19.2W	1100		24V		3000K 4000K 6500K		