


ZELA Deep Fixed Downlight




- + recessed for low glare
- + suitable for indoor and exterior (soffits)
- + excellent beam designs
- + IP65 front

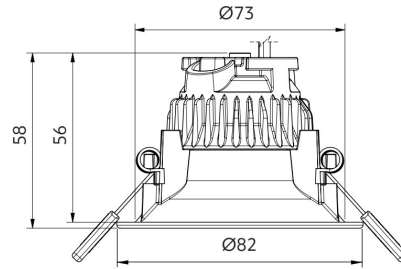

Options

Beam angle



Trim colour



CCT



¹ Sunset Dimming is available in 30°, 40° and 55° in Professional series.
² Tunable White is available in 20°, 30°, 40°, and 55° in Art series.

CRI

Professional series (P) CRI 90-94 Art series (A) CRI 95-98

Driver

Phase cut dim (standard)
DALI 2 tunable white (TW) / Dimming
SLiC Casambi TW / Dimming

Use with

ZELA adapter plates for retrofit installations

Product information

(example: Prismatic, 40°, 3000K, CRI 90, phase cut driver)

Driver (mA)	Power (W)	Delivered lumens (lm)	Insulation coverable		
			NZ	AU	UK/EU
100	4.3	410	IC-F	IC-4	✓
150	6.4	580	IC-F	IC-4	✓
180	7.7	680	IC-F	IC-4	✓
220	9.4	790	IC-F	IC-4	✓
260	11.1	900	CA135	CA90	✓



*Specification is for ceiling material ≤ 13mm with a phase cut driver.



Get in touch

Follow us

U4 / 61-71 Beauchamp Rd,
Matraville NSW 2036

02 9317 4177
0425 350 698

sales@tecled.com.au
Victoria@tecled.com.au





ZELA look-up table

			Lens						Honeycomb				Prismatic				Clear glass				Opaque	
			9° Lens		15° Lens		20° Lens		30° Honeycomb		40° Honeycomb		40° Prismatic		55° Prismatic		40° Clear		55° Clear		90° Opaque	
CCT	Driver Power*		CRI	Lm	CRI	Lm	CRI	Lm	CRI	Lm	CRI	Lm	CRI	Lm	CRI	Lm	CRI	Lm	CRI	Lm	CRI	Lm
2400K	4.3W / 100mA	ICF	-	-	-	-	90	350	90	250	90	240	90	370	90	360	90	370	90	360	90	270
	6.4W / 150mA	ICF	-	-	-	-	90	490	90	350	90	350	90	520	90	520	90	520	90	520	90	390
	7.7W / 180mA	ICF	-	-	-	-	90	570	90	410	90	400	90	610	90	600	90	610	90	600	90	450
	9.4W / 220mA	ICF	-	-	-	-	90	670	90	480	90	470	90	710	90	700	90	710	90	700	90	530
	11.1W / 260mA	CA135	-	-	-	-	90	760	90	550	90	530	90	810	90	800	90	810	90	800	90	600
2700K	4.3W / 100mA	ICF	97	280	90	290	97	370	97	270	97	260	97	390	97	390	97	390	97	390	97	290
	6.4W / 150mA	ICF	97	390	90	410	97	530	97	380	97	370	97	560	97	550	97	560	97	550	97	420
	7.7W / 180mA	ICF	97	460	90	480	97	610	97	440	97	430	97	650	97	640	97	650	97	640	97	480
	9.4W / 220mA	ICF	-	-	90	560	97	720	97	510	97	500	97	760	97	750	97	760	97	750	97	570
	11.1W / 260mA	CA135	-	-	90	640	97	810	97	580	97	570	97	860	97	850	97	860	97	850	97	640
3000K	4.3W / 100mA	ICF	97	290	90	300	97	380	97	280	97	270	97	410	97	400	97	410	97	400	97	300
	6.4W / 150mA	ICF	97	410	90	430	97	550	97	390	97	380	97	580	97	570	97	580	97	570	97	430
	7.7W / 180mA	ICF	97	470	90	500	97	640	97	460	97	450	97	680	97	670	97	680	97	670	97	500
	9.4W / 220mA	ICF	-	-	90	590	97	750	97	540	97	520	97	790	97	780	97	790	97	780	97	590
	11.1W / 260mA	CA135	-	-	90	660	97	840	97	610	97	590	97	900	97	880	97	900	97	880	97	670
4000K	4.3W / 100mA	ICF	97	300	90	320	97	400	97	290	97	280	97	430	97	420	97	430	97	420	97	320
	6.4W / 150mA	ICF	97	430	90	450	97	570	97	410	97	400	97	610	97	600	97	610	97	600	97	460
	7.7W / 180mA	ICF	97	500	90	520	97	670	97	480	97	470	97	710	97	700	97	710	97	700	97	530
	9.4W / 220mA	ICF	-	-	90	620	97	780	97	560	97	550	97	830	97	820	97	830	97	820	97	620
	11.1W / 260mA	CA135	-	-	90	700	97	890	97	640	97	620	97	940	97	930	97	940	97	930	97	700
Sunset Dimming 3000K-1850K	6.4W / 150mA	ICF	-	-	-	-	-	-	90	320	90	280	90	460	90	450	90	460	90	450	-	-
	7.7W / 180mA	ICF	-	-	-	-	-	-	90	370	90	330	90	530	90	520	90	530	90	520	-	-
	9.4W / 220mA	ICF	-	-	-	-	-	-	90	430	90	390	90	630	90	610	90	630	90	610	-	-
	11.1W / 260mA	CA135	-	-	-	-	-	-	90	490	90	440	90	710	90	690	90	710	90	690	-	-
Tunable White 1800K-4000K	4.6W / 100mA	ICF	-	-	-	-	95	250	95	200	95	190	95	290	95	290	95	290	95	290	-	-
	6.9W / 150mA	ICF	-	-	-	-	95	360	95	280	95	270	95	420	95	420	95	420	95	420	-	-
	8.3W / 180mA	ICF	-	-	-	-	95	420	95	330	95	310	95	490	95	490	95	490	95	490	-	-
	10.1W / 230mA	CA135	-	-	-	-	95	490	95	390	95	370	95	570	95	570	95	570	95	570	-	-
	11.9W / 260mA	CA135	-	-	-	-	95	560	95	440	95	420	95	650	95	650	95	650	95	650	-	-



Get in touch

U4 / 61-71 Beauchamp Rd,
Matraville NSW 2036

02 9317 4177
0425 350 698

sales@tecled.com.au
Victoria@tecled.com.au

Follow us

