


ZELA Fixed Downlight



- + compact size
- + suitable for indoor and exterior (soffits)
- + excellent beam designs
- + IP65 front

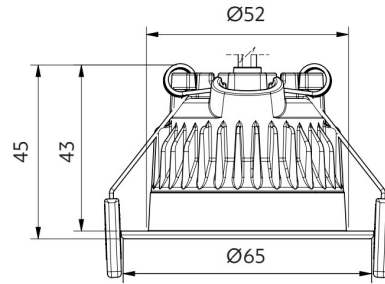

Lens
Spot lighting



Honeycomb
Anti-glare lighting



Clear glass
Task & general lighting



Prismatic
General & task lighting



Opaque
Wide angle lighting

Options

Beam angle



Lens



Honeycomb ULG clear Prismatic Opaque

Trim colour



Textured white RAL 9016
Textured black B104

CCT



¹ Sunset Dimming is available in 30°, 40° and 55° in Professional series.
² Tunable White is available in 20°, 30°, 40°, and 55° in Art series.

CRI

Professional series (P) CRI 90-94 Art series (A) CRI 95-98

Driver

Phase cut dim (standard)
DALI 2 tunable white (TW) / Dimming
SLiC Casambi TW / Dimming

Use with

ZELA adapter plates for retrofit installations

Product information

(example: Prismatic, 40°, 3000K, CRI 90, phase cut driver)

Driver (mA)	Power (W)	Delivered lumens (lm)	Insulation coverable		
			NZ	AU	UK/EU
100	4.3	400	IC-F	IC-4	✓
150	6.4	580	IC-F	IC-4	✓
180	7.7	670	IC-F	IC-4	✓
220	9.4	780	CA135	CA90	✓



Size 65x43mm



Cut-out Ø52-57mm



Hole depth >100mm*



Front

*Specification is for ceiling material ≤ 13mm with a phase cut driver.



Get in touch

Follow us

U4 / 61-71 Beauchamp Rd,
Matraville NSW 2036

02 9317 4177
0425 350 698

sales@tecled.com.au
Victoria@tecled.com.au





ZELA look-up table

CCT	Driver Power*		Lens						Honeycomb				Prismatic				Clear				Opaque	
			9° Lens		15° Lens		20° Lens		30° Honeycomb		40° Honeycomb		40° Prismatic		55° Prismatic		40° ULG clear		55° ULG clear		90° Opaque	
			CRI	Lm	CRI	Lm	CRI	Lm	CRI	Lm	CRI	Lm	CRI	Lm	CRI	Lm	CRI	Lm	CRI	Lm	CRI	Lm
2400K	4.3W / 100mA	ICF	-	-	-	-	90	350	90	260	90	240	90	360	90	350	90	360	90	350	90	290
	6.4W / 150mA	ICF	-	-	-	-	90	490	90	370	90	340	90	520	90	500	90	520	90	500	90	410
	7.7W / 180mA	ICF	-	-	-	-	90	570	90	430	90	400	90	600	90	580	90	600	90	580	90	480
	9.4W / 220mA	CA135	-	-	-	-	90	670	90	500	90	470	90	710	90	680	90	710	90	680	90	560
2700K	4.3W / 100mA	ICF	97	280	90	280	90	370	90	270	90	260	90	390	90	370	90	390	90	370	90	310
	6.4W / 150mA	ICF	97	390	90	400	90	520	90	390	90	370	90	550	90	530	90	550	90	530	90	440
	7.7W / 180mA	ICF	97	460	90	470	90	610	90	450	90	430	90	640	90	620	90	640	90	620	90	510
	9.4W / 220mA	CA135	-	-	90	550	90	710	90	530	90	500	90	750	90	720	90	750	90	720	90	600
3000K	4.3W / 100mA	ICF	97	290	90	290	90	380	90	290	90	270	90	400	90	390	90	400	90	390	90	320
	6.4W / 150mA	ICF	97	410	90	420	90	540	90	410	90	380	90	580	90	550	90	580	90	550	90	460
	7.7W / 180mA	ICF	97	470	90	480	90	630	90	470	90	440	90	670	90	640	90	670	90	640	90	530
	9.4W / 220mA	CA135	-	-	90	570	90	740	90	550	90	520	90	780	90	750	90	780	90	750	90	620
4000K	4.3W / 100mA	ICF	97	300	90	310	90	400	90	300	90	280	90	420	90	410	90	420	90	410	90	340
	6.4W / 150mA	ICF	97	430	90	440	90	570	90	430	90	400	90	600	90	580	90	600	90	580	90	480
	7.7W / 180mA	ICF	97	500	90	510	90	660	90	500	90	460	90	700	90	670	90	700	90	670	90	560
	9.4W / 220mA	CA135	-	-	90	600	90	780	90	580	90	550	90	820	90	790	90	820	90	790	90	650
Sunset Dimming 3000K-1850K	6.4W / 150mA	ICF	-	-	-	-	-	-	90	310	90	280	90	450	90	450	90	450	90	450	-	-
	7.7W / 180mA	ICF	-	-	-	-	-	-	90	360	90	330	90	530	90	530	90	530	90	530	-	-
	9.4W / 220mA	CA135	-	-	-	-	-	-	90	420	90	390	90	620	90	620	90	620	90	620	-	-
Tunable White 4000K-1800K	4.6W / 100mA	ICF	-	-	-	-	95	250	95	200	95	190	95	290	95	290	95	290	95	290	-	-
	6.9W / 150mA	ICF	-	-	-	-	95	350	95	280	95	270	95	420	95	420	95	420	95	420	-	-
	8.3W / 180mA	CA135	-	-	-	-	95	410	95	330	95	310	95	490	95	490	95	490	95	490	-	-
	10.1W / 230mA	Do not cover	-	-	-	-	95	470	95	390	95	370	95	570	95	570	95	570	95	570	-	-



Get in touch

U4 / 61-71 Beauchamp Rd,
Matraville NSW 2036

02 9317 4177
0425 350 698

sales@tecled.com.au
Victoria@tecled.com.au

Follow us

