


ZELA Offset Deep Tiltz Downlight



- + ideal for wall washing and sloped ceilings
- + suitable for indoor and exterior (soffits)
- + recessed for low glare
- + excellent beam designs
- + IP65 front

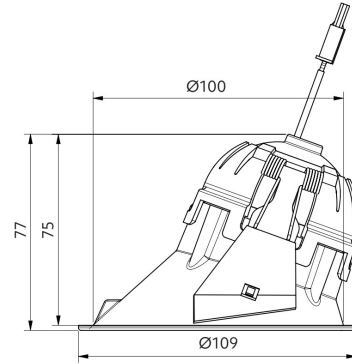

Lens

Spot lighting



Honeycomb

Anti glare lighting



Clear glass

Task & general lighting



Prismatic

General & task lighting



Opaque

Wide angle lighting

Options

Beam angle



9° 15° 20°

Lens



30° 40° 55° 90°

Honeycomb Clear glass Prismatic Opaque

Trim colour



CCT



¹ Sunset Dimming is available in 30°, 40° and 55° in Professional series.
² Tunable White is available in 20°, 30°, 40°, and 55° in Art series.

CRI

Professional series (P) CRI 90-94 Art series (A) CRI 95-98

Driver

Phase cut dim (standard)
DALI 2 tunable white (TW) / Dimming
SLiC Casambi TW / Dimming

Product information

(example: Prismatic, 40°, 3000K, CRI 90, phase cut driver)

Driver (mA)	Power (W)	Delivered lumens (lm)	Insulation coverable		
			NZ	AU	UK/EU
150	6.4	590	IC-F	IC-4	✓
180	7.7	690	IC-F	IC-4	✓
220	9.4	800	IC-F	IC-4	✓
260	11.1	910	IC-F	IC-4	✓
300	12.8	1010	CA135	CA90	✓



Tilt Angle 15°



Offset Angle 20°



Size 109x75mm



Cut-out Ø100mm



Hole depth >80mm*



Front

*Specification is for ceiling material ≤ 13mm with a phase cut driver.



Get in touch

Follow us

U4 / 61-71 Beauchamp Rd,
Matraville NSW 2036

02 9317 4177
0425 350 698

sales@tecled.com.au
Victoria@tecled.com.au





ZELA look-up table

CCT	Driver Power*		Lens						Honeycomb				Prismatic				Clear				Opaque	
			9° Lens		15° Lens		20° Lens		30° Honeycomb		40° Honeycomb		40° Prismatic		55° Prismatic		40° Clear		55° Clear		90° Opaque	
			CRI	Lm	CRI	Lm	CRI	Lm	CRI	Lm	CRI	Lm	CRI	Lm	CRI	Lm	CRI	Lm	CRI	Lm	CRI	Lm
2400K	4.3W / 100mA	ICF	-	-	-	-	90	340	90	260	90	240	90	370	90	370	90	370	90	370	90	280
	6.4W / 150mA	ICF	-	-	-	-	90	490	90	370	90	340	90	530	90	530	90	530	90	530	90	400
	7.7W / 180mA	ICF	-	-	-	-	90	570	90	430	90	400	90	620	90	610	90	620	90	610	90	460
	9.4W / 220mA	ICF	-	-	-	-	90	660	90	500	90	460	90	720	90	720	90	720	90	720	90	540
	11.1W / 260mA	ICF	-	-	-	-	90	750	90	570	90	530	90	820	90	810	90	820	90	810	90	610
2700K	4.3W / 100mA	ICF	97	280	90	300	90	360	90	270	90	250	90	400	90	390	90	400	90	390	90	300
	6.4W / 150mA	ICF	97	390	90	420	90	520	90	390	90	360	90	570	90	560	90	570	90	560	90	420
	7.7W / 180mA	ICF	97	460	90	490	90	600	90	460	90	420	90	660	90	650	90	660	90	650	90	490
	9.4W / 220mA	ICF	-	-	90	580	90	710	90	530	90	490	90	770	90	770	90	770	90	770	90	580
	11.1W / 260mA	ICF	-	-	90	660	90	800	90	610	90	560	90	880	90	870	90	880	90	870	90	650
3000K	4.3W / 100mA	ICF	97	290	90	310	90	380	90	290	90	260	90	410	90	410	90	410	90	410	90	310
	6.4W / 150mA	ICF	97	410	90	440	90	540	90	410	90	380	90	590	90	580	90	590	90	580	90	440
	7.7W / 180mA	ICF	97	470	90	510	90	630	90	470	90	440	90	690	90	680	90	690	90	680	90	510
	9.4W / 220mA	ICF	-	-	90	600	90	740	90	560	90	510	90	800	90	800	90	800	90	800	90	600
	11.1W / 260mA	ICF	-	-	90	680	90	840	90	630	90	580	90	910	90	900	90	910	90	900	90	680
4000K	4.3W / 100mA	ICF	97	300	90	320	90	400	90	300	90	280	90	430	90	430	90	430	90	430	90	320
	6.4W / 150mA	ICF	97	430	90	460	90	570	90	430	90	400	90	620	90	610	90	620	90	610	90	460
	7.7W / 180mA	ICF	97	500	90	540	90	660	90	500	90	460	90	720	90	710	90	720	90	710	90	540
	9.4W / 220mA	ICF	-	-	90	630	90	770	90	580	90	540	90	840	90	840	90	840	90	840	90	630
	11.1W / 260mA	ICF	-	-	90	720	90	880	90	660	90	610	90	960	90	950	90	960	90	950	90	710
Sunset Dimming 3000K-1800K	6.4W / 150mA	ICF	-	-	-	-	-	-	90	300	90	270	90	470	90	460	90	470	90	460	-	-
	7.7W / 180mA	ICF	-	-	-	-	-	-	90	340	90	320	90	550	90	530	90	550	90	530	-	-
	9.4W / 220mA	ICF	-	-	-	-	-	-	90	400	90	370	90	640	90	620	90	640	90	620	-	-
	11.1W / 260mA	ICF	-	-	-	-	-	-	90	460	90	420	90	730	90	710	90	730	90	710	-	-
Tunable White 4000K-1800K	4.6W / 100mA	ICF	-	-	-	-	95	250	95	200	95	190	95	290	95	290	95	290	95	290	-	-
	6.9W / 150mA	ICF	-	-	-	-	95	360	95	280	95	270	95	420	95	420	95	420	95	420	-	-
	8.3W / 180mA	ICF	-	-	-	-	95	420	95	330	95	310	95	490	95	490	95	490	95	490	-	-
	10.1W / 230mA	ICF	-	-	-	-	95	490	95	390	95	370	95	570	95	570	95	570	95	570	-	-
	11.9W / 260mA	CA135	-	-	-	-	95	550	95	440	95	420	95	650	95	650	95	650	95	650	-	-



Get in touch

U4 / 61-71 Beauchamp Rd,
Matraville NSW 2036

02 9317 4177
0425 350 698

sales@tecled.com.au
Victoria@tecled.com.au

Follow us

